




Neuma
DOORS®



ROYAL COLLECTION
DESIGNED FOR IMPACT

6068 Gliding Full Lite Door
Smooth White Finish | LoE 366 Glass

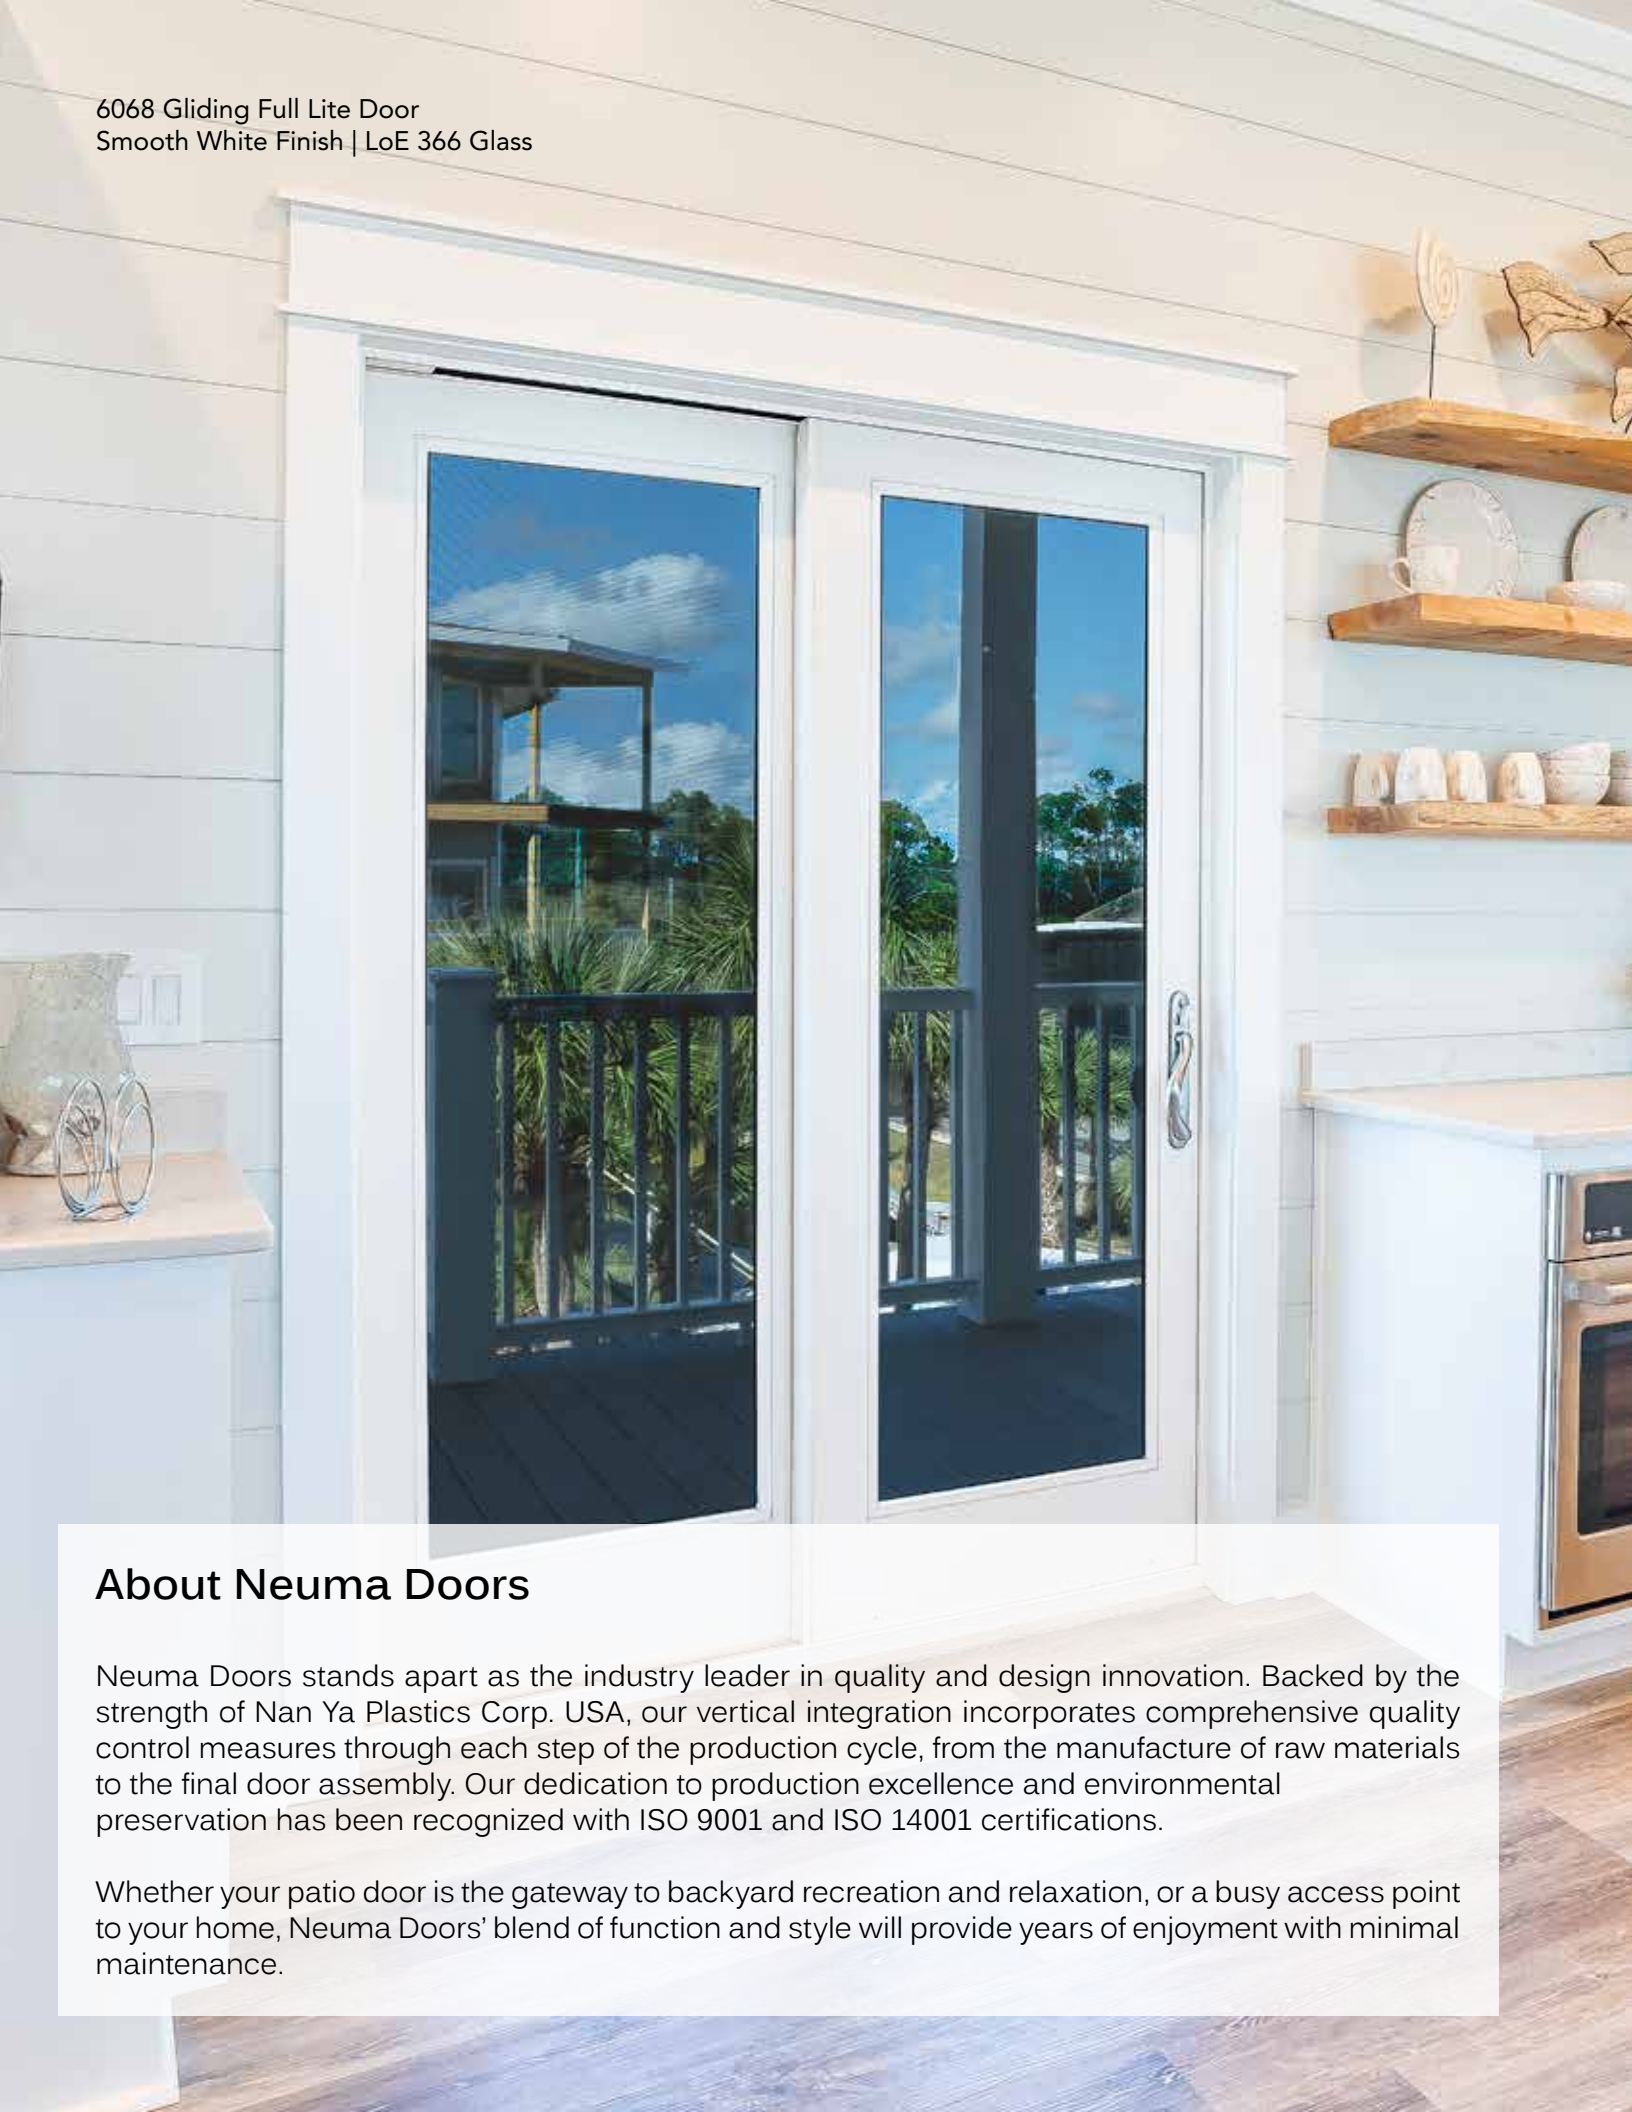

About Neuma Doors

Neuma Doors stands apart as the industry leader in quality and design innovation. Backed by the strength of Nan Ya Plastics Corp. USA, our vertical integration incorporates comprehensive quality control measures through each step of the production cycle, from the manufacture of raw materials to the final door assembly. Our dedication to production excellence and environmental preservation has been recognized with ISO 9001 and ISO 14001 certifications.

Whether your patio door is the gateway to backyard recreation and relaxation, or a busy access point to your home, Neuma Doors' blend of function and style will provide years of enjoyment with minimal maintenance.



Neuma Royal Collection

Table of Contents

Neuma Benefits

06	Testing and Impact Doors
08	Complete Door System
10	Energy Efficiency
12	Door Design

Products

14	Hinged Series
20	Hinged Unit Dimensions
30	Vented Sidelight
32	Vented Sidelight Unit Dimensions
33	Hinged Transom Unit Dimensions
35	Hinged Test Results
38	Folding Series
42	Gliding Series
48	Gliding Unit Dimensions
54	Gliding Test Results
56	Bypass Gliding Series
60	Bypass Gliding Unit Dimensions
61	Bypass Gliding Test Results

Design Options

63	Transom and Sidelight Options
67	Glazing Options
69	Blinds Between The Glass
70	Finish Options
72	Hardware Options
75	Additional Options

Guides

76	Product Details
77	Door Design Specifications
79	Handing Guide
80	Painting Guide
81	Staining Guide
82	Oxidation/Chalking Cleaning Guide
83	Maintenance Guide
84	Ideal Construction
86	Warranty

*** Colors and finishes in this publication are not actual representations.

Visual Impact

Something as simple as a door can have a dramatic Visual Impact on your home. The right door brings out the best qualities in your home and can be the focal point of your indoor-outdoor patio space. Clean lines, rich textures, and tall glass panes provide your home with a strong atmosphere of elegance. Low maintenance fiberglass is easy to clean should you chose to let the standard finish shine and easy to paint or stain, allowing you to add a personal flair.

Extend your living area with a Neuma Patio Door and create a flexible space that accommodates the way you live. Open or closed, you can appreciate expansive, unobstructed views and create a space that is open to the outdoor views and infused with natural light with all Nemua Door systems. Our patio doors are designed with visual impact in mind, offering flush glazed windows, realistic woodgrain patterns, and a wide range of transoms and sidelights. With customization options such as color, lite pattern, and configuration, your door will be a true reflection of your style and leave a lasting impact on all of your guests.

Designed to Last

As an entry point to your home, it is essential that your patio door provide safety and security as well as protection against incoming weather. Neuma Doors are designed to withstand the impact of extreme weather conditions. Our precision engineered door units protect your home against water infiltration and stand up against extreme heat and cold.

Neuma Doors offers a variety of impact rated door options for added protection. Designed to safeguard people and property, Neuma Impact Doors are built to stay strong during high wind events that can hurl debris at the door. The high impact fiberglass panels with a dense foam core and laminated impact glass work together to keep the effects of extreme weather from penetrating the door. For safety and security, the laminated glass in an impact door contains a cut resistant vinyl interlayer that remains intact and adheres to glass fragments should the glass ever be broken.





12080 Double Hinged Full Lite Door with Sidelight
Smooth White Finish | LoE 366 Glass



We believe that doors should be beautiful and durable, protecting your family while maintaining exceptional style. Neuma Doors undergo rigorous testing to help ensure that each door meets our highest standards, meets building code requirements and withstands the test of time without compromising beauty.

Designed to perform well for years to come, Neuma Doors are tested in accordance with the following test standards:

ASTM E 283	Air infiltration
ASTM E 331 / E 547	Water resistant
ASTM E 330	Uniform structural load
ASTM E1886 / E1996	Impact / cycle test
AAMA 1304	Forced entry resistance test
TAS 201	Impact test
TAS 202	Air / water / structural test
TAS 203	Wind pressure cycle test
NFRC 100 / 200 / 500	Energy efficiency
NFRC 102 / 400 Thermal nd Air	Sound transmission
ASTEM E90 / STC / OITC	Operating cycle test
AAMA 920	North America fenestration test
AAMA / WDMA / CSA 101 / I.S./A440 (NAFS)	

DESIGNED TO PROTECT

Impact Doors

Designed to protect people and property during violent storms, Neuma's Impact Rated Doors provide the ultimate storm protection for your home and include the following standard features:

- High impact fiberglass panels for strength and durability
- 1" insulated laminated impact glass for extra security and protection against broken glass
- Multi-point lock for added security
- HPVD (High Physical Vapor Deposition) for additional protection in harsh environments


Designed for use in coastal areas, Neuma's Impact Doors offer added protection against storm damage from high winds and flying debris. High impact fiberglass panels combined with Impact glass help protect your home and prevent your door from becoming an entry point for water, wind and storm debris.

If the glass on a Neuma Impact Door is broken, our standard 1" insulated laminated impact glass maintains its integrity thanks to the vinyl interlayer which remains in the door frame. This vinyl interlayer stays intact and prevents broken glass fragments and additional debris from entering the home. Unlike most other doors on the market, Neuma Doors' unique removable glazing bead allows for glass replacement without the added expense of purchasing an entirely new unit.


Neuma's Impact Rated Doors are certified for use in wind-borne debris regions by the Texas Department of Insurance and Florida Building Code, with HVHZ options available for use in High Velocity Hurricane Zones. Neuma Doors Impact Hinged Inswing and Gliding Doors can withstand windstorm of over 145 mph and our Hinged Outswing can withstand windstorm as high as 170 mph. (AAMA / NWWDA / CAS101 / I.S. 2 / A440-8)



Our Impact Series helps preserve the house's envelope to minimize the damage from the storm's elements.



If a home has been breached through a broken door or window, wind can then enter. This causes an increase in pressure that can lift the roof and push the walls outward.

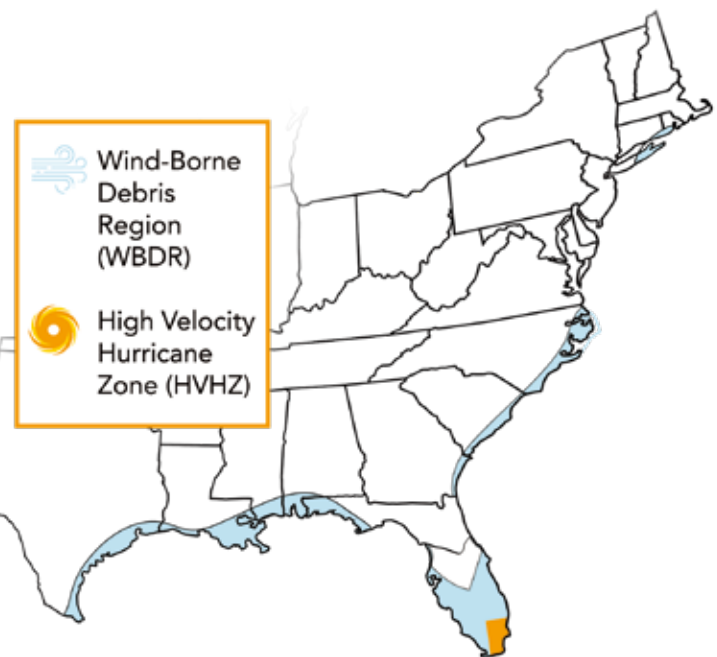

Note: this map represents an approximation of the WBDR and HVHZ areas. Consult local building codes for exact requirement

With a variety of door styles, design options and configurations, Neuma Doors are an affordable option to expensive and unsightly roll-down or accordion style shutters.

Designed as a Complete Door System

Weather Guard System

Neuma Door's Weather Guard System is designed to provide the best combination of performance, durability, security and appearance.

Neuma Door Systems are precision engineered to guard against water infiltration. The specially engineered composite material will never absorb water, eliminating the problems commonly associated with wood and metal doors.

Designed with a unique double astragal system, Neuma Doors create a weather-proof barrier that keeps rain and wind from penetrating the seal of the door.


Neuma Doors with an insulating foam core and LoE glass, guard against harsh heat and UV rays from the sun, protecting furnishings from fading and helping drive down heating and cooling costs.



**WEATHER
GUARD**
S Y S T E M

12080 Gliding Full Lite Doors
Smooth White Finish | LoE 366 Glass

Neuma Doors, designed as a complete door system, are a smart investment in your home due to the outstanding durability and energy efficiency.

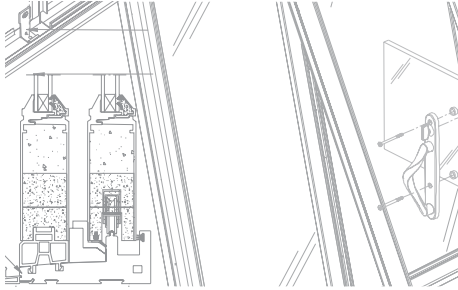

Precision Engineered

Neuma Doors are complete door systems with components purposely designed to work together for optimal performance with lasting durability. The door panel, frame, hardware and weather-stripping all function cohesively to provide superior protection.



Factory Assembled

Neuma Doors are meticulously assembled in our state of the art factory by craftsmen with an eye for detail. A factory assembled pre-hung Neuma Door reduces the chance of possible errors in assembly that sometimes occur with a field-assembled door.



Tested as a Complete Unit

Neuma Doors undergo extensive testing. We test the integrity of our entire door system, not only the individual components. This comprehensive testing provides assurance that the entire door system performs to expectations.



Composite Frame

The composite frame is made of non-porous material that is impervious to penetration by water. The frame will never absorb water, swell, split or rot, minimizing the need for maintenance and extending the life of the door.



Sturdy Hardware

As a complete system, Neuma Doors include hardware components. From the stainless steel rollers and hinges, integrated flush bolts, to the included handle set. Each component is built to last.



High Quality Fiberglass Door Panels

Thanks to advancements in manufacturing, Neuma fiberglass panels are available in highly realistic woodgrain or smooth texture options that are easy to stain or paint and even easier to maintain. Constructed from high compression molded fiberglass with full composite stiles and rails, Neuma Door panels are not susceptible to moisture conditions or pest infestations. Unlike doors made from other materials, Neuma Doors will not absorb water, dent or rot; resulting in a reliable option that will look beautiful for years to come.



Energy Efficient

Neuma Door is not only a beautiful addition to your home, but helps save money on heating and cooling costs year-round. Standard LoE366 insulated glass with Argon Gas and an insulating foam core provides superior energy performance.



Flush Glazed Door Panels

The flush glazed system of a Neuma Door offers a clean finished appearance and additional protection against water intrusion. The integrated glazing bead allows the glass to sit flush within the door without an unsightly screwed on glazing frame. The easily removed glazing bead allows replacement of the door glass if needed.

Designed for Energy Efficiency

Environmental Responsibility

As part of our ongoing commitment to environmental conservation, Neuma Doors, backed by Nan Ya Plastics Corp. USA, has developed comprehensive programs focused on recycling, reducing carbon emissions and water and energy conservation.

As the leading manufacturer of energy efficient patio doors, we help reduce home energy use across the country and are a proud partner with the Environmental Protection Agency's ENERGY STAR Program.

ENERGY STAR is an EPA voluntary program that helps businesses and individuals save money and protect our climate through superior energy efficiency. ENERGY STAR certified doors lower energy bills, reduce greenhouse gas emissions from power plants and help keep the indoor environment consistently comfortable.

Reduce Your Energy Use


Home energy use accounts for about one-quarter of your carbon footprint. As part of an energy efficient home, Neuma Doors certified doors help reduce your energy use.

Stay Warm in the Winter


With ENERGY EFFICIENT certified Neuma Doors, the interior glass stays warmer, so you can stay warm even when the outside temperature is below freezing.

Stay Cool in the Summer

Neuma Doors help you stay cool on hot summer days. By reducing the "heat gain" into your home without reducing the visible light, you get a bright space without the extra heat.

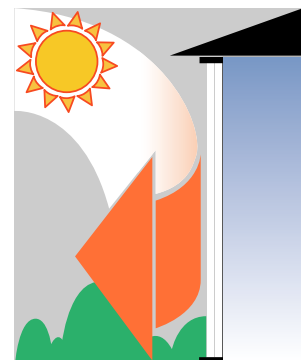


Reflects the sun's heat & damaging UV rays in **summer**

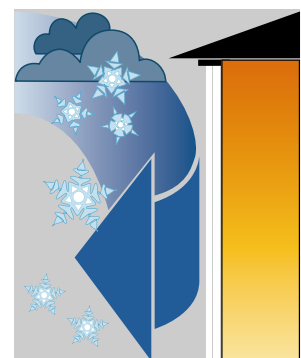

Keeps the cold weather out and the warm air in during the **winter**

What makes a Neuma Door Energy Efficient?

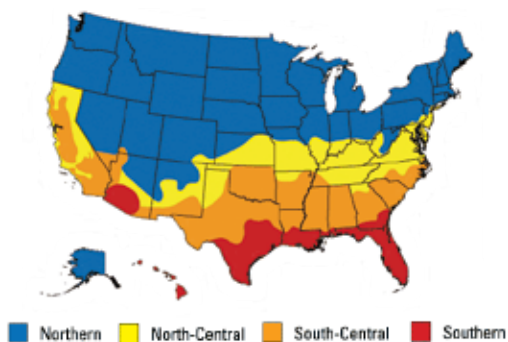

Certain Neuma Doors meet or exceed the rigorous testing in EPA-recognized laboratories and meet the U-Factor and SHGC (Solar Heat Gain Coefficient) qualifications for Energy Star Certification.

Door			
Glazing Level	U-Factor ¹	SHGC ²	
Opaque	≤ 0.17	No Rating	
≤1/2-Lite	≤ 0.23	≤ 0.23	
>1/2- Lite	≤ 0.26	Northern North-Central	≤ 0.40
	≤ 0.28	Southern South-Central	≤ 0.23

U-Factor measures how well the door prevents heat from escaping the home. The lower the U-Factor, the better the door performs at keeping heat inside.

SHGC measures how much heat from the sun is blocked by the door. The lower the SHGC, the better the protection against solar heat.

*** Colors and finishes in this publication are not actual representations.



- 1 Insulated energy efficient glass reduces heat flow.
- 2 Improved polyurethane foam core for energy efficient insulation.
- 3 Precision engineered door system with weather stripping for reduced air leakage.

Design The Perfect Door

for your space



6068 Gliding Full Lite Door with Transom
Black Painted Finish | LoE 366 Glass

Let your home's personality shine through with customizable door options. Neuma Doors provides an array of design options to fit seamlessly with your home's style. Sidelights next to the door or transom windows above the door expand the visual impact, letting in light and creating a larger viewing area. Create a classic look with a traditional SDL (simulated divided lite) pattern. Craft a contemporary look with a bypass door that allows unobstructed views and the flexibility to open your space and blur the lines between indoor and outdoor living. A variety of stain, paint, and hardware finish options allow you to accent your décor and create the perfect door for you.

*** Colors and finishes in this publication are not actual representations.



1 Select Your Door Type

Choose from Hinged, Folding, Gliding or Bypass Gliding Doors.

Select our Full Lite door style for maximum views or choose the 3/4 Lite door style for added architectural detail.



3 Select Your Glass

Add a touch of style to your door with our divided lite options, available as simulated divided lites (SDL) or as grilles between the glass (GBG).

When privacy is a concern, select blinds between the glass, now available in an energy efficient LoE option.

*** Colors and finishes in this publication are not actual representations.



2 Select Your Configuration

Select the number of panels. With options from a single door to 4 panel configurations, Neuma offers the best design to fit your space. Our wide range of configurations allows you the flexibility to design your perfect door.

Enhance your door and increase your viewing area with sidelights and transoms.



4 Select Your Finishes And Hardware

Handlesets and hardware are included with your Neuma Door system. Select the hardware style and color to compliment your home.



Choose from our smooth white paintable finish or one of our woodgrain options to best suit your space.

HINGED SERIES

- Panels and frames made of fiberglass and composite material, a part of the Weather Guard System for advanced moisture protection and maximum durability
- Durable fiberglass skins will not rust, dent, split or rot
- Energy Efficient
- Durable polyurethane foam panel core
- Stainless steel hinges
- Removable glazing bead for easy glass replacement
- Door heights available in 6'-8", 6'-11", 7'-6" and 8'-0" sizes
- Frames available in 4-9/16" or 6-9/16" sizes, Net jamb dimensions are 5-3/4" or 7-3/4" (See pg. 24 for more details)
- Thresholds include drainage systems to channel water away from doors
- Paintable smooth surface or unstained woodgrain are standard with pre-finished options available
- Doors tested for structural stability, water infiltration, air infiltration, forced entry, sound transmission, and energy efficiency






9080 Double Hinged Full Lite Door
with Sidelight | Black Painted Finish
Rain Glass

*** Colors and finishes in this publication are not
actual representations.

FEATURES

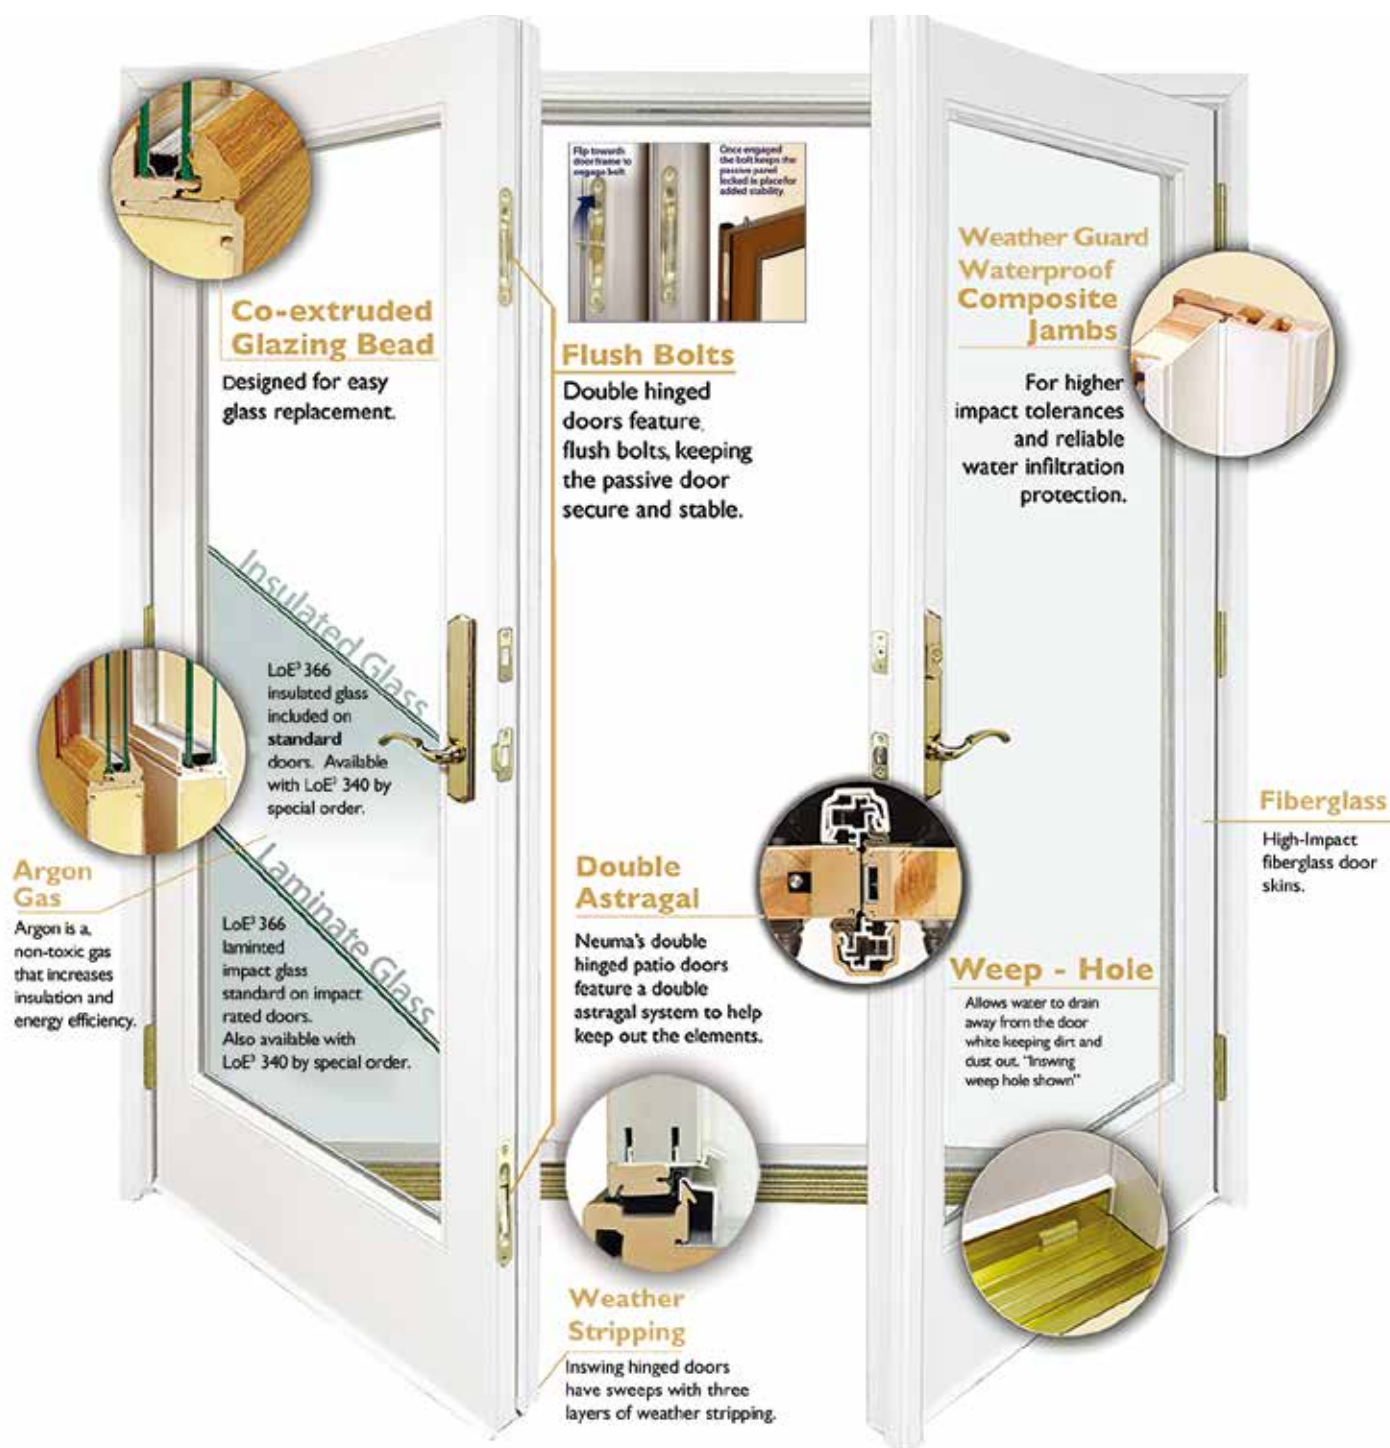

The Neuma Door system is ready to install and provides complete protection from the elements. Doors and frames are engineered to work together to withstand use in the harshest environments.



6080 Double Hinged 3/4 Lite Door | Mahogany Finish
LoE366 Glass | 6 Lite SDL

SELECT AND BUILD YOUR OWN HINGED UNIT

Full Lite Option

Full Lite units available in smooth white, and stainable woodgrain finishes.

Single Hinged/ Fixed Units



Double Hinged



Center Hinged



3/4 Lite Option

3/4 Lite units available in a smooth white or a mahogany grain finish that emulates the beauty of natural hard-wood.





Unique to our Center Hinge Design

Neuma's center hinge design has unique features that allow it to withstand the elements and allow for years of reliable use.



1 Our durable aluminum mullion, covered with composite material, can withstand strong winds and heavy rains.



2 Built-in screen channels make retractable screen installation a simple task.

3 Continuous head and sill for increased strength.

*** Colors and finishes in this publication are not actual representations.

Combo Options




Grille Options




Grilles are used to visually divide the glass area of the door for added architectural detail. Grilles Between Glass (GBG) are aluminum grilles sealed between the two layers of glass and offer an attractive low maintenance option. Simulated Divided Lites (SDL) are applied directly to the glass surface and offer a more traditional appearance. Neuma offers a variety of grille patterns

Grille Patterns


8' Height




12-Lite




18-Lite




4 Lite



4 Lite Tall




3 Lite




Prairie


6'8 & 6'11 Height



10-Lite




15-Lite




4 Lite



4 Lite Tall




3 Lite




Prairie

Mull Kits

Hinged Outswing



Hinged Inswing



Be creative in building a custom large view hinged door design. Build a three panel hinged door unit with a single opening on a center hinged unit or broaden your double hinged into a 2+1 or 2+2 unit.

Standard Features Chart

Hinged Door - Standard Features	Hinged 6'8" & 6'11"	Hinged Impact 6'8" & 6'11"	Hinged 7'6" & 8'0"	Hinged Impact 7'6" & 8'0"
Smooth White Interior or Unstained Woodgrain	•	•	•	•
Smooth White Exterior or Unstained Woodgrain	•	•	•	•
Tiffany or Royal Handleset in Black, White, Dark Brown, Gold, Brass or Satin Nickel	•		•	
HPVD Royal Handleset in Satin Nickel or Gold Brass		•		•
Sill Color Matched with Handleset (white handleset comes with satin nickel sill)	•	•	•	•
Single Point Lock	•			
Multi Point Lock		•	•	•
4 9/16" Jamb Width (Net 5-3/4")	•	•	•	•
LoE ³ 366 Glass	•		•	
LoE ³ 366 Laminated Impact Glass		•		•




































HINGED UNIT DIMENSIONS

Full Lite

Fixed Sidelight


Single Panel Units

Two Panel Units


Rough Opening		1'- 3/4"	1'-2 3/4"	2'	2'-2 13/16"	2'-7 3/8"	2'-9 3/8"	3'-1 3/8"	4'-2 3/4"	5'	5'-4"	6'	
Unit Dim.		1'	1'-2"	1'-11 1/4"	2'-2 1/16"	2'-6 5/8"	2'-8 5/8"	3'-0 5/8"	4'-2"	4'-11 1/4"	5'-3 1/4"	5'-11 1/4"	
Glass Dim.		7"	7"	13 3/8"	13 3/8"	20"	22"	26"	13 3/8"	20"	22"	26"	
6'-8"	6'-7 1/2"	64"											
			1068	1268	2068	2268	2668	2868	3068	4068	5068	5468	6068
6'-11"	6'-10 1/2"	64"											
			10611	12611	20611	22611	26611	28611	30611	40611	50611	54611	60611
Glass Dim. 24 1/2"													
7'-6"	7'-5 1/2"	70"											
			3076									6076	
Glass Dim. 24 1/2"													
8'-0"	7'-11 1/2"	80"											
			1080	1280	2080	2280	2680	2880	3080	4080	5080	5480	6080

Full Lite Handing

Inswing

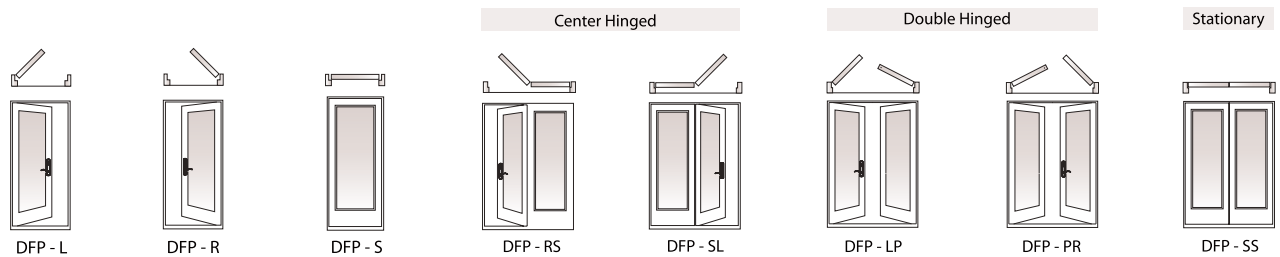


Outswing

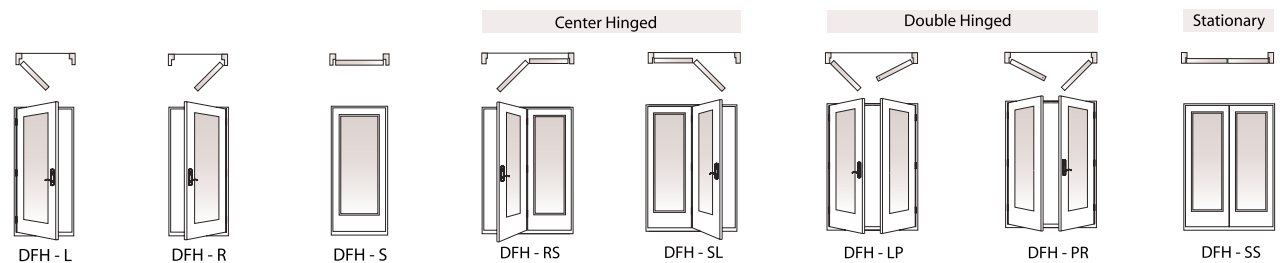

Full Lite

Three Panel Center Hinged Units

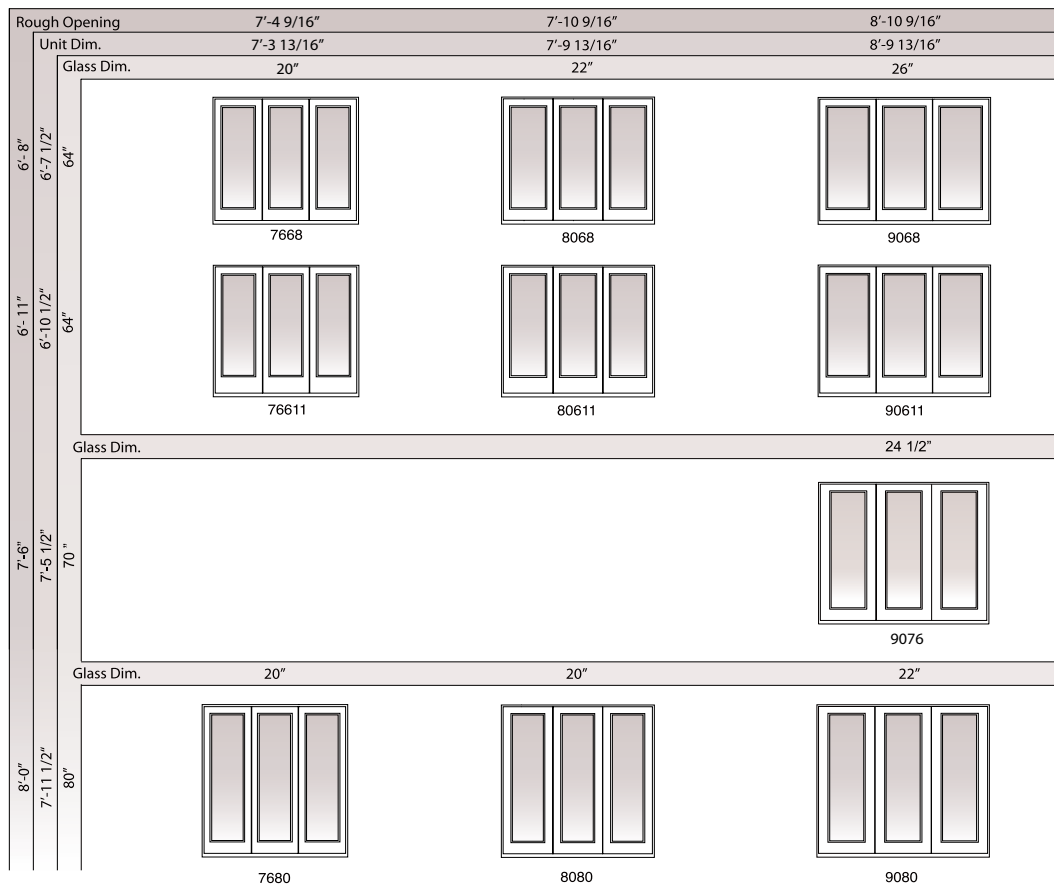


LEGEND

- Handing from exterior view
- Doors are not reversible
- Retractable screen available as an option


S = Stationary
R = Hinge at right side exterior view
L = Hinge at left side exterior view
DFP = Inswing
DFH = Outswing

Grille Patterns


6'8 & 6'11 Height

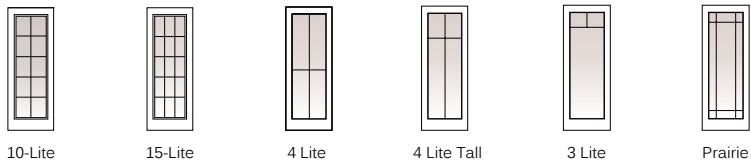


8' Height

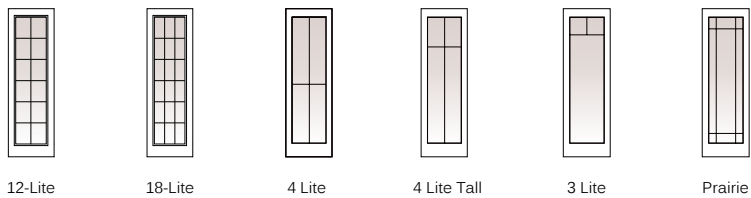

Inswing

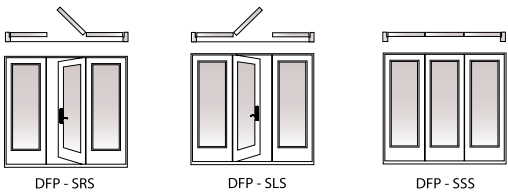

Outswing

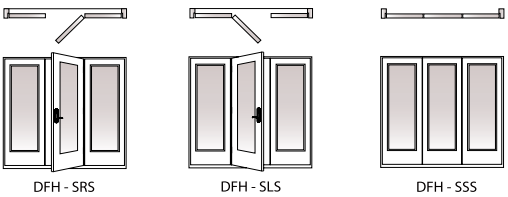


Full Lite Panel Specifications


Fixed Sidelight Panels

Hinged Patio Door - Fixed Sidelights

Inswing

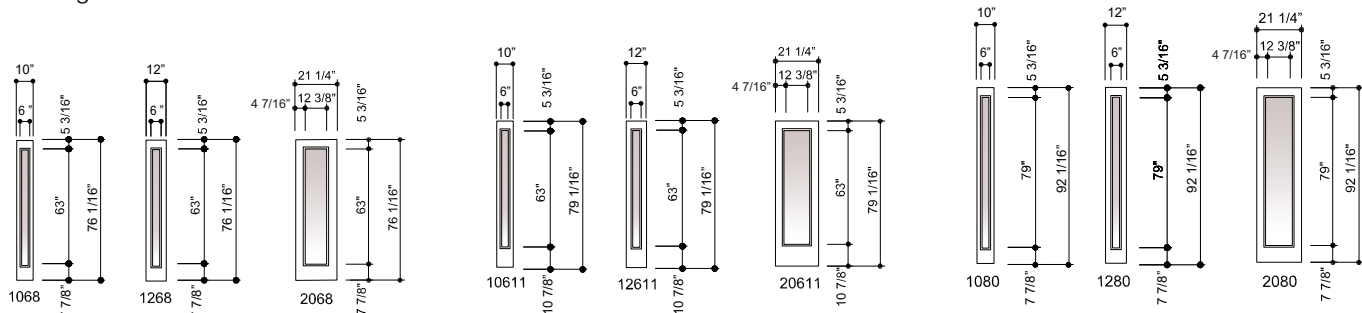

Outswing

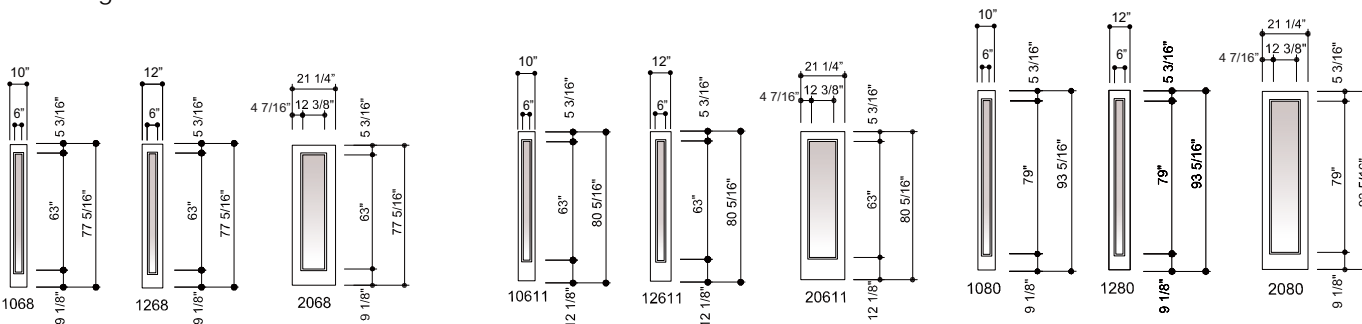


12080 Double Hinged Full Lite Door with Sidelites
Smooth White Finish | LoE 366 Glass


Full Lite Panel Specifications

Inswing & Outswing Patio Doors

Hinged Patio Door - Inswing

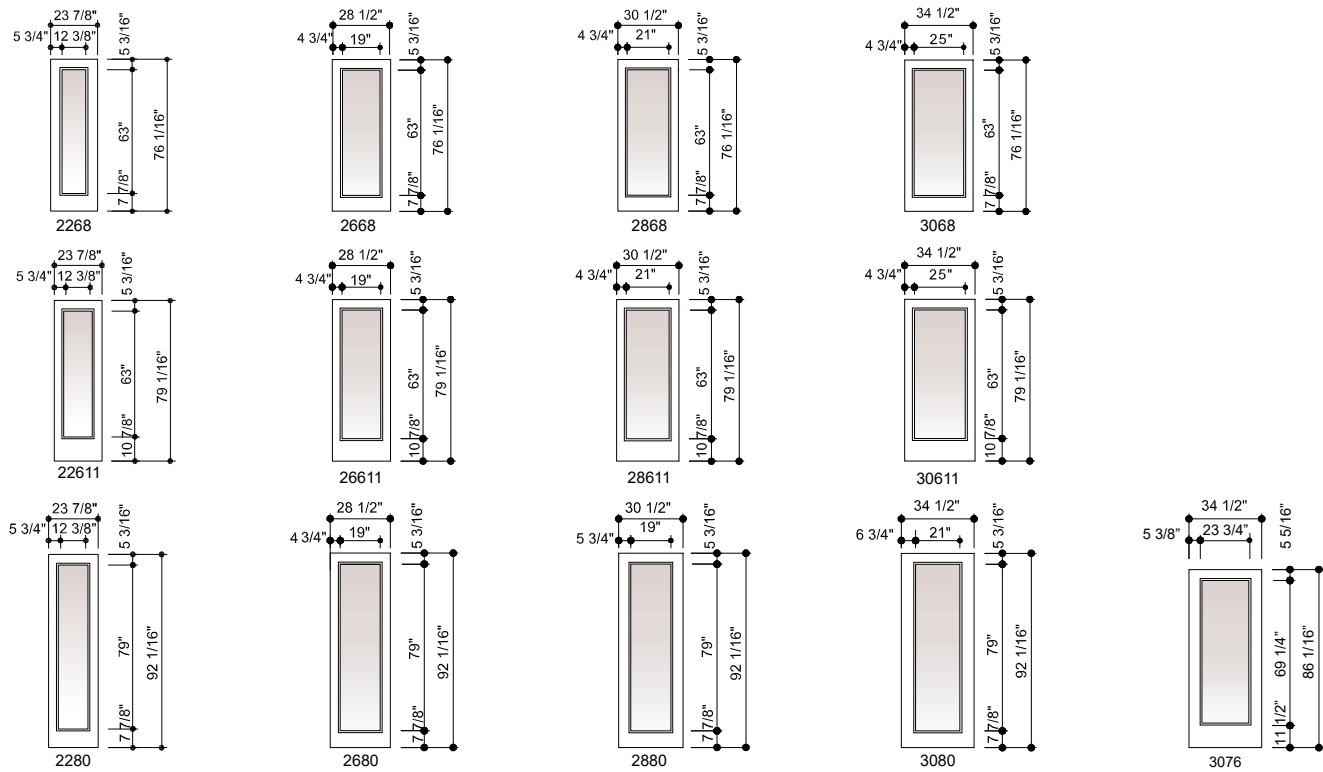


Hinged Patio Door - Outswing

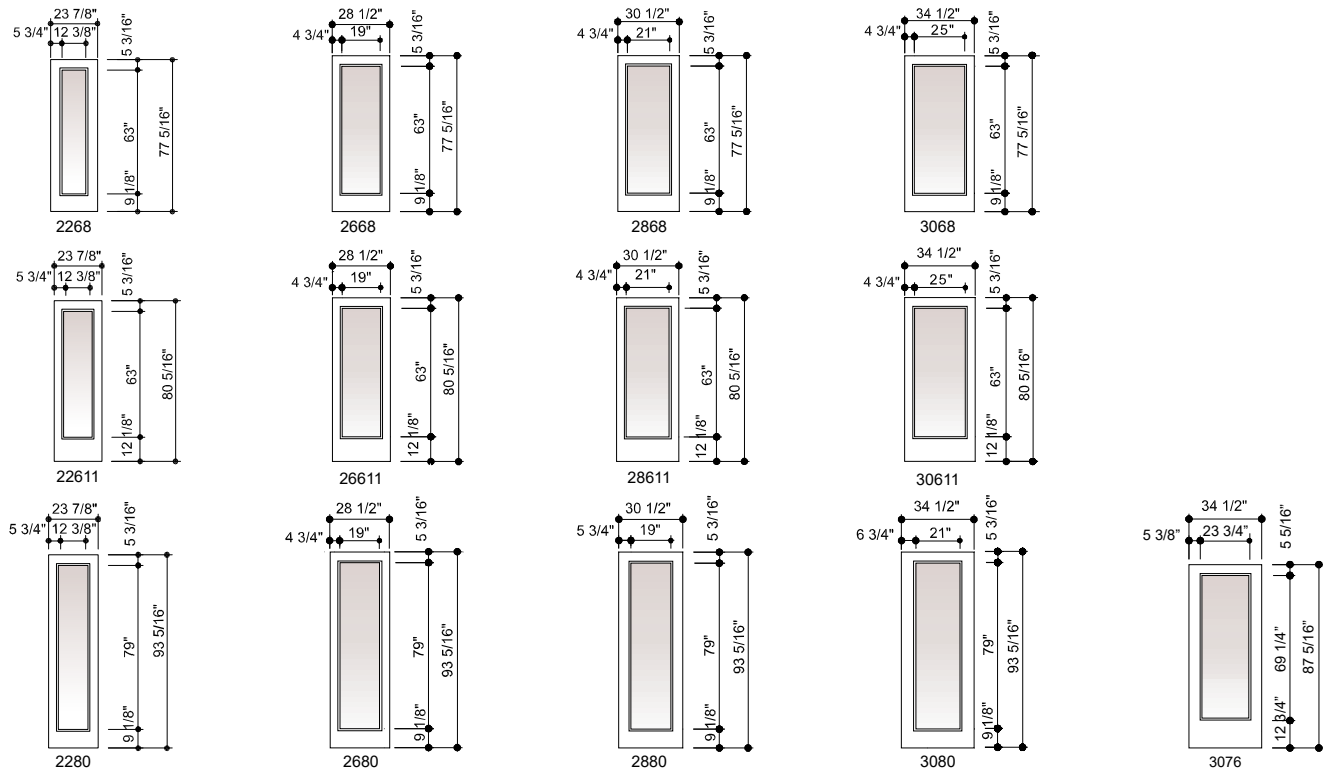


Mull Kits

Hinged Outswing

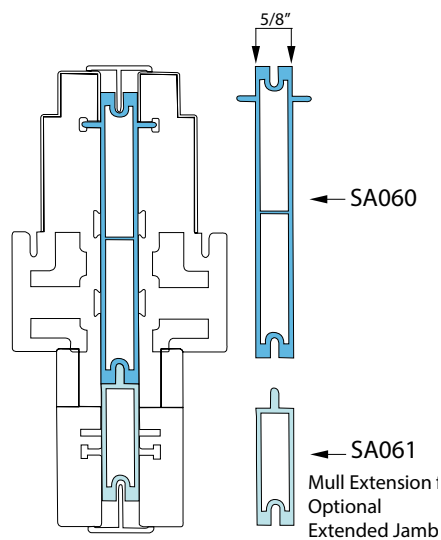


Hinged Inswing

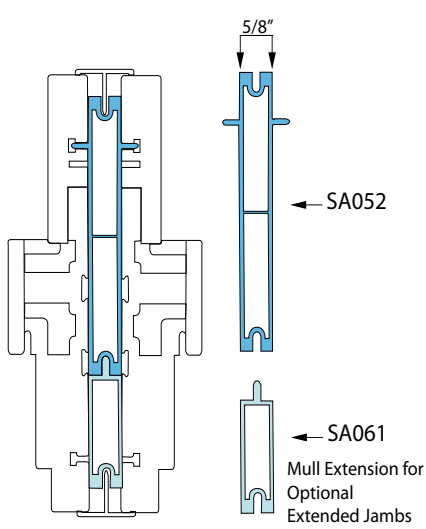




When creating a custom configuration by combining panels and door units, add 5/8" to the unit dimension to allow for the width of the aluminum mull.

ADA Handicap Sill



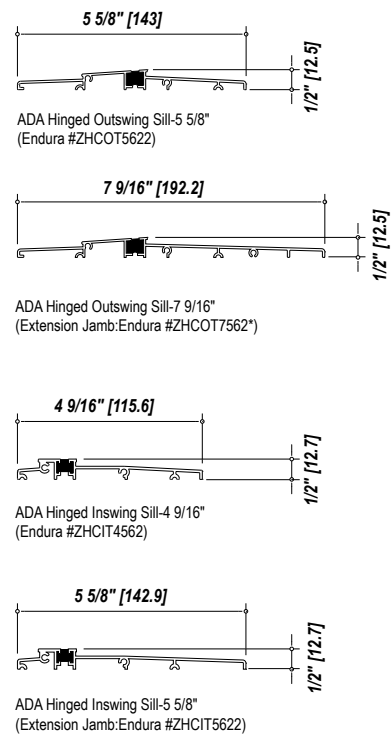


Hinged Jamb

Outswing Hinged Jamb

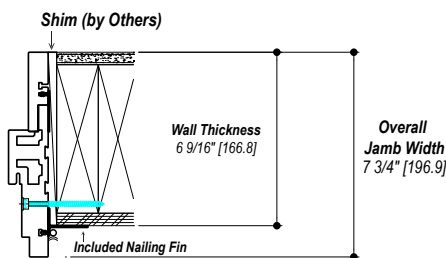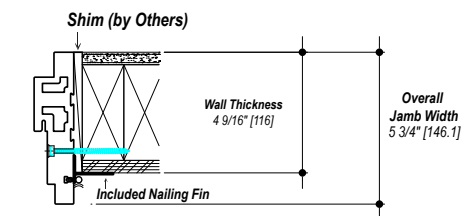

Inswing Hinged Jamb

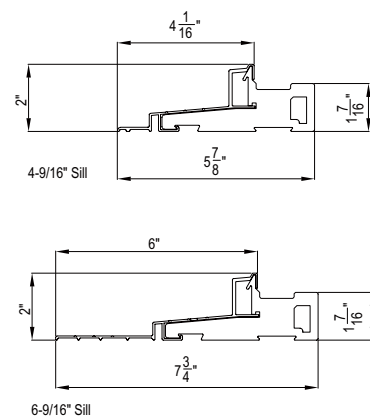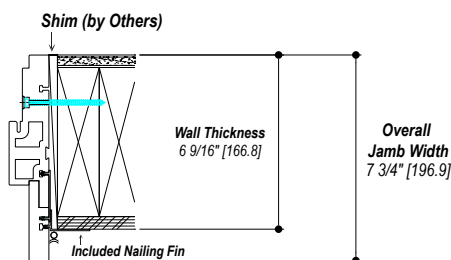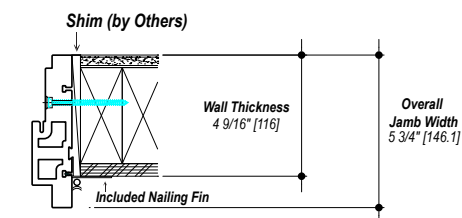





Single Hinged Full Lite Door
Smooth White Finish | LoE 366 Glass

3/4 Lite

Fixed Sidelight Single Panel Units

Rough Opening		1'-2 3/4"	2'-7 3/8"	2'-9 3/8"	3'-1 3/8"
Unit Dim.		1'-2"	2'-6 5/8"	2'-8 5/8"	3'-0 5/8"
Glass Dim.		7"	20"	22"	26"
6'-8"	6'-7 1/2"	 1268	 2668	 2868	 3068
	48"				
6'-11"	6'-10 1/2" (for Inswing) 6'-9 1/4" (for Outswing)	 12611	 26611	 28611	 30611
	48"				
Glass Dim.		8"	20"	22"	26"
8'-0"	7'-11 1/2"	 1280	 2680	 2880	 3080
	64"				

Two Panel Units


Rough Opening		5'	5'-4"	6'
Unit Dim.		4'-11 1/4"	5'-3 1/4"	5'-11 1/4"
Glass Dim.		20"	22"	26"
6'-8"	6'-7 1/2"	 5068	 5468	 6068
	48"			
6'-11"	6'-10 1/2" (for Inswing) 6'-9 1/4" (for Outswing)	 50611	 54611	 60611
	48"			
Glass Dim.		20"	22"	26"
8'-0"	7'-11 1/2"	 5080	 5480	 6080
	64"			

3/4 Lite Handing


Inswing



DFP - L



DFP - R



DFP - S

LEGEND

- Handing from exterior view
- Doors are not reversible
- Retractable screen available as an option

P = Passive

S = Stationary

R = Hinge at right side exterior view

L = Hinge at left side exterior view


DFP = Inswing

DFH = Outswing

Outswing



DFH - L




DFH - R




DFH - S

Inswing

Center Hinged




DFP - RS




DFP - SL

Double Hinged




DFP - LP



DFP - PR


Stationary




DFP - SS

Outswing

Center Hinged




DFH - RS




DFH - SL

Double Hinged




DFH - LP



DFH - PR










Stationary




DFH - SS

3/4 Lite


Three Panel Center Hinged Units

Rough Opening		7'-4 9/16"	7'-10 9/16"	8'-10 9/16"
Unit Dim.		7'-3 13/16"	7'-9 13/16"	8'-9 13/16"
Glass Dim.		20"	22"	26"
6'-8"	6'-7 1/2"	 7668	 8068	 9068
	48"			
6'-11"	6'-10 1/2" (for Inswing) 6'-9 1/4" (for Outswing)	 76611	 80611	 90611
	48"			
Glass Dim.		20"	22"	26"
8'-0"	7'-11 1/2"	 7680	 8080	 9080
	64"			


Inswing



DFP - SRS



DFP - SLS




DFP - SSS


Outswing



DFH - SRS



DFH - SLS




DFH - SSS


3/4 Lite

Inswing & Outswing Patio Doors


Hinged Patio Door - Inswing

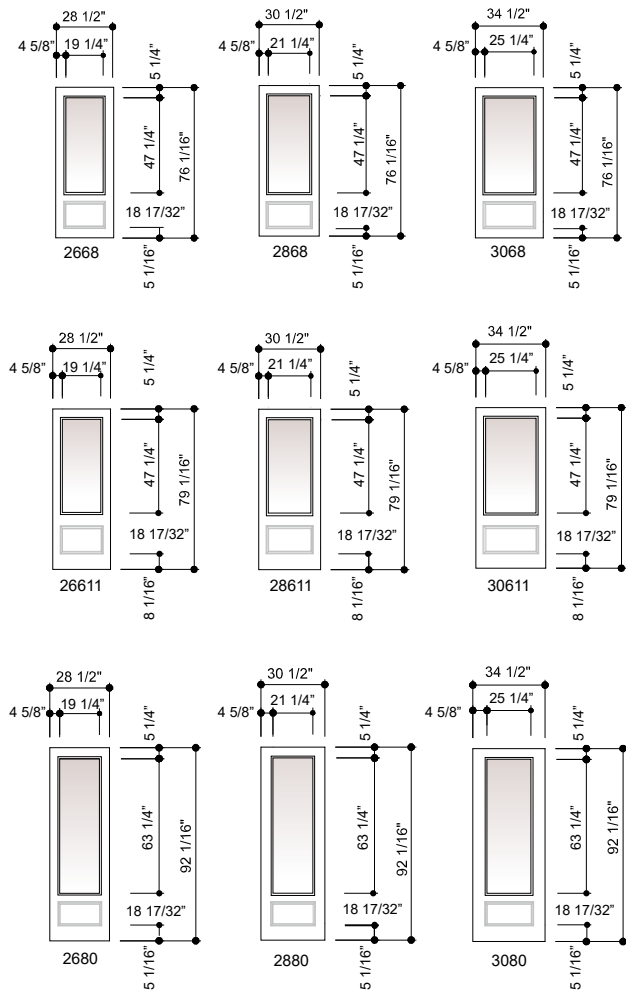


Hinged Patio Door - Outswing

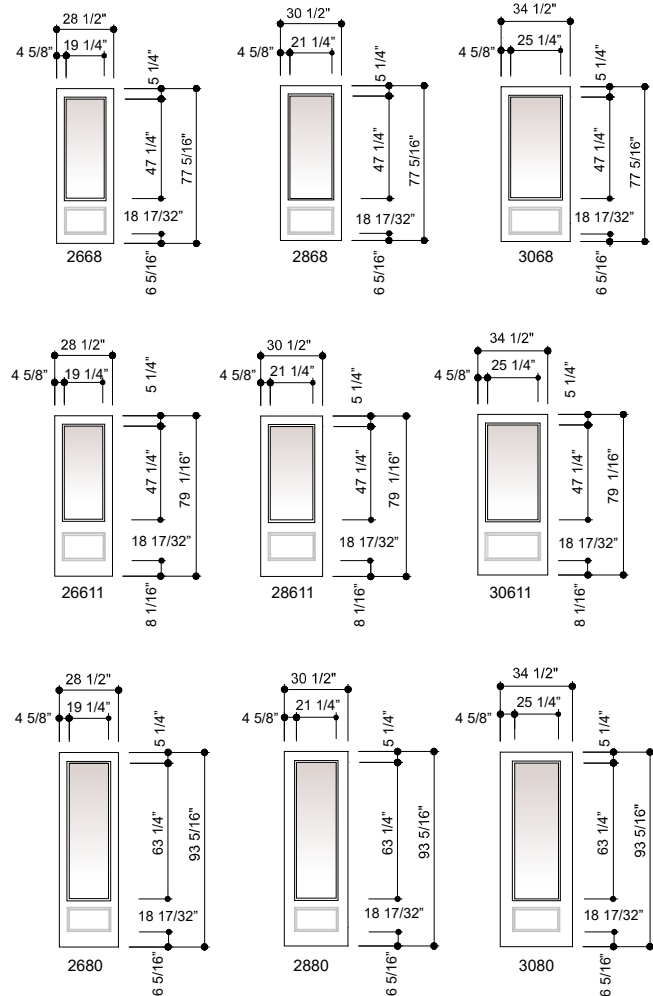

Hinged Patio Door Sidelights - Inswing

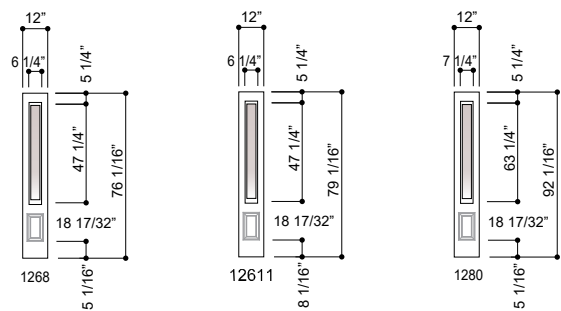

Hinged Patio Door Sidelights - Outswing

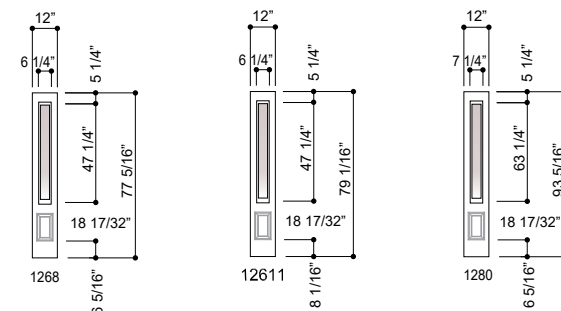



8068 Double Hinged Vented Sidelight Door
Smooth White | LoE 340 Glass



VENTED SIDELIGHT OPTIONS

Operable Vented Sidelights

- Continuous head and sill, with a mullion system designed to maximize stability and ease of installation.
- Sidelights come standard with multipoint locking system for stability and security.
- Sidelights come standard with stationary screens for maximum comfort. Screens are removable for cleaning.
- No extra assembly required. Vented Sidelight door units are designed and delivered fully assembled.
- Fully operable hinged sidelights
- Available in woodgrain finish
- Optional retractable screens available



Height 6'-8" only
Width 6'-0" and 8'-0"



Shown with golden oak finish, gold brass Royal handle set.



Fully Operable Hinged Sidelights

Sidelight vents feature a craftsman style thumb-turn.



Shown with medium oak finish and satin nickel Royal handle set.

*** Colors and finishes in this publication are not actual representations.

VENTED SIDELIGHT UNIT DIMENSIONS


Vented Sidelight

Rough Opening	5'-10 3/4"	7'-10 3/4"
Unit Dim.	5'-10"	7'-10"
Glass Dim.	26", 9"	20", 9"

6'-8"
6'-7 1/2"
64"


6068 8068

Inswing Vented Sidelight 6'8" Retro Fit

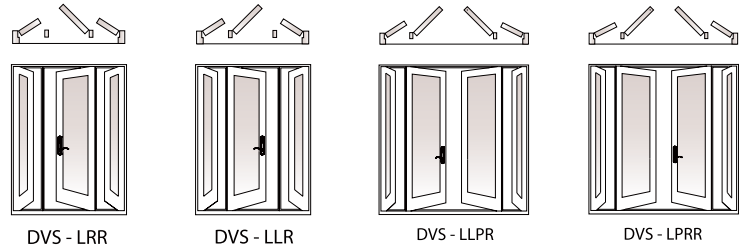


Vented Sidelight Panel Specifications

6068 Vented Sidelight

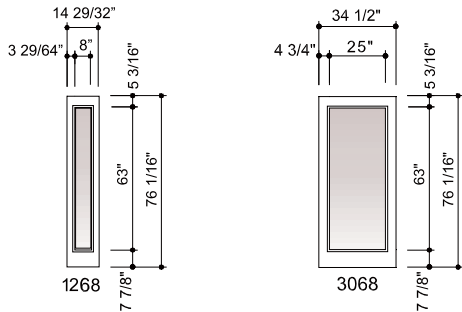

8068 Vented Sidelight

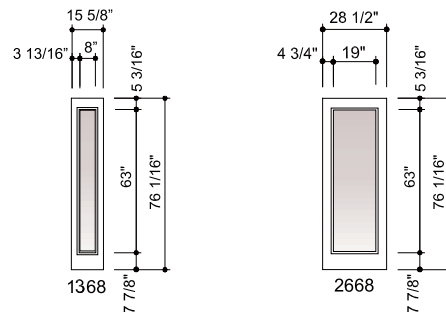

LEGEND

- Handing from exterior view
- Doors are not reversible
- Retractable screen available as an option

P = Passive
S = Stationary
R = Hinge at right side exterior view
L = Hinge at left side exterior view
DVS = Vented Sidelight

*For all product testing approval numbers and information, please visit <http://www.neumadoors.com/resource>

**For Florida Building Code; Texas Department of Insurance & High Velocity Hurricane Zone Approval, Please see : https://floridabuilding.org/pr_app_srch.aspx

HINGED TRANSOM UNIT DIMENSIONS

Transoms For Hinged Doors

Single Panel Units

Two Panel Units

Rough Opening	2'-7 3/8"	2'-9 3/8"	3'-1 3/8"	5'	5'-4"	6'
Unit Dim.	2'-6 5/8"	2'-8 5/8"	3'-0 5/8"	4'-11 1/4"	5'-3 1/4"	5'-11 1/4"
Glass Dim.	28 1/2"	30 1/2"	34 1/2"	57 1/8"	61 1/8"	69 1/8"
				27 3/4"	29 3/4"	33 3/4"
1'-1/2"						
1'-4 1/2"						
2'-1/2"						
2'						
2'-1/2"						
2'						

LEGEND



1. Rough Opening Width = Unit Dim. Width + 3/4"
2. Rough Opening Height = Unit Dim. Height + 1/2"
3. Glass Option: Clear / Inner Grille / Art Glass
4. Custom Size Also Available by Special Order
5. Standard Transoms are Equal Size Glass
6. Special Size or Special Lite Pattern Must be by Special Order
7. GTI = Inswing
8. GTO = Outswing
9. GTV = Vented Sidelight

For Three Panel Units

Rough Opening	7'-4 9/16"	7'-10 9/16"	8'-10 9/16"
Unit Dim.	7'-3 13/16"	7'-9 13/16"	8'-9 13/16"
Glass Dim.	27 7/16"	29 7/16"	33 7/16"
1'-1/2"			
1'-4 1/2"			
2'-1/2"			

For Vented Sidelight

Rough Opening	4'-11 1/2"	5'-10 3/4"	7'-10 3/4"
Unit Dim.	4'-10 3/4"	5'-10"	7'-10"
Glass Dim.	56 5/8"	67 7/8"	77 1/2"
1'-1/2"			
1'-4 1/2"			
2'-1/2"			



Note: Transom grid patterns may not align with certain doors. Please call for assistance with transom selection.

*All transoms with divided lites are True Divided Lite (TDL). Grille between glass (GBG) and simulated divided lite (SDL) options are also available.



6080 Double Hinge Full Lite Door
Black Painted

*** Colors and finishes in this publication are not actual representations.

HINGED TEST RESULTS

Hinged Non-Impact

Full Lite Inswing Non-Impact AAMA Test Results

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
3068, 30611, L/R/S	DP40	+90/-90	6.0	0.09	SHD-CLASS R-PG40 144" X 83"
6068, 60611, LP/PR/SL/RS/SS	DP40	+90/-90	6.0		
12068, 120611, SLPS/SPRS	DP40	+90/-90	6.0		
3080, L/R/S	DP40	+75/-75	7.5	0.02	SHD-CLASS R-PG50 144" X 96"
6080, LP/PR/SL/RS/SS	DP40	+75/-75	7.5		
12080, SLPS/SPRS	DP40	+75/-75	7.5		

3/4 Lite Inswing - Non-Impact AAMA Results

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
12080 SLPS	DP50	+75/-75	7.5	0.006	SHD-class R-PG50 143 1/8"x95 1/2"
120611 SLPS	DP50	+75/-75	7.5	0.1	SHD-class R-PG50 143 1/8"x82 1/2"

Full Lite Outswing - Non-Impact AAMA Test Results

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
3068, 30611, L/R/S	DP65	+97.5/-97.5	9.75	0.19	SHD-CLASS R-PG70 143 1/4" X 82 1/2"
	DP70	+105/-105	10.5		
6060, 60611, LP/PR/SL/RS/SS	DP65	+97.5/-97.5	9.75		
	DP70	+105/-105	10.5		
12068, 120611, SLPS/SPRS	DP65	+97.5/-97.5	9.75		
	DP70	+105/-105	10.5		
3080, L/R/S	DP65	+97.5/-97.5	9.75	0.14	SHD-CLASS R-PG70 143 1/4" X 95 3/4"
	DP70	+105/-105	10.5		
6080, LP/PR/SL/RS/SS	DP65	+97.5/-97.5	9.75		
	DP70	+105/-105	10.5		
12080, SLPS/SPRS	DP65	+97.5/-97.5	9.75		
	DP70	+105/-105	10.5		

3/4 Lite Outswing - Non-Impact AAMA Test Results

Product Specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
12080 SLPS	DP50	+75 / -75	7.5	0.001	SHD-class R-PG50 143 1/8"x95 1/2"
12068,SLPS	DP50	+75 / -75	7.5	0.001	SHD-class R-PG50 143 1/8"x79 1/2"

Vented Sidelight - Non-Impact AAMA Results

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	AAMA 101 Standard
8068, LLPR	DP30	+45/-45	4.5	0.02	HGD-LC30 94" X 83"

Energy Performance Rating - Non-Impact Hinged

			Energy Star Climate Zones						
Door Type	Door Style	Glass Type	North	North Central	South	South Central	U-Factor	SHGC	VT
Hinged Non-Impact	Full Lite	LoE ³ 366	*	*	*	*	0.25	0.14	0.30
		LoE ³ 340	*	*	*	*	0.25	0.09	0.18
		LoE ³ Blinds	-	-	-	-	0.27	0.25	0.28
	3/4 Lite	LoE ³ 366	*	*	*	*	0.25	0.09	0.20

Sound Transmission Class - Non-Impact Hinged

Product Specification	STC	OITC	Product Specification	STC	OITC
3080 Outswing Pemko ADA Sill (1" Special Glass)	35	28	6068, LP Outswing (0.625" Standard Non-Impact Glass)	29	25
3080 Outswing Extended Pemko ADA Sill (5/8" Standard Glass)	31	27	6080 Outswing Pemko ADA Sill (1" Special Non-Impact Glass)	30	27
3080 Inswing Endura ADA Sill (1" Special Glass)	31	26	6080 Inswing Endura ADA Sill (1" Special Non-Impact Glass)	29	24

Hinged Transoms

Transom Test Results - Non Impact

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	AAMA 101 Standard	Type
GTI 6020	DP80	+120/-120	12.00	0.01	TR-LC80 71 1/4" X 24"	Inswing
GTI 12020 (with mullion)	DP75	+120/-120	11.25	0.01	TR-R75 145 3/8" X 24"	
GTO 6020	DP80	+120/-120	12.00	0.01	TR-LC80 71 1/4" X 24"	Outswing
GTO 12020 (with mullion)	DP75	+120/-120	11.25	0.01	TR-R75 145 3/8" X 24"	

Transom Test Results Impact

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	Test Standard	Type
GTI/GTO 6020	DP80	+120/-120	12.00	0.01	TAS 201/202/203	Inswing & Outswing
GTI/GTO 12020 (with mullion)	DP80	+120/-120	12.00	0.01	TAS 201/202/203	

Hinged Impact

Full Lite - Impact & Cycle Testing Performance

Product specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft ²)	Test Standard
Inswing SLPS (OXXO)	11'11" X 6'11"	DP50	+75/-75	7.5	0.03	ASTM E1886/ASTM E1996
Outswing SLPS (OXXO)	11'11" X 6'11"	DP50	+75/-75	7.5	0.01	ASTM E1886/ASTM E1996
		DP70	+105/-105	10.5		
Outswing SLP (OXX)	9'1" X 6'11"	DP70	+105/-105	10.5	0.003	TAS201/202/203
Inswing SLPS (OXXO)	11'11" X 8'0"	DP50 Structural Only	+75/-75	2.9	0.002	ASTM E1886/ASTM E1996
Inswing SLP (OXX)	9'1" X 8'0"	DP50 Structural Only	+75/-75	3.75	0.12	TAS201/202/203
Outswing SLPS (OXXO)	11'11" X 8'0"	DP50	+75/-75	7.5	0.003	ASTM E1886/ASTM E1996
		DP70	+105/-105	10.5		
Outswing SLP (OXX)	9'1" X 8'0"	DP50	+75/-75	7.5	0.01	TAS201/202/203
Outswing SLPL (OXXO)	12'1" X 8'0"	DP70	+105/-105	10.5	0.002	TAS201/202/203

3/4 Lite - Impact & Cycle Testing Performance

Product specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft ²)	Test Standard
Inswing SLP (OXX)	8'10" X 8'0"	DP50 Structural Only	+75/-75	3.75	0.003	ASTM E1886/ASTM E1996
Outswing SLP (OXX)	8'10" X 8'0"	DP50	+75/-75	7.5	0.001	ASTM E1886/ASTM E1996
Outswing SLPS (OXXO)	11'11" X 6'8"	DP50	+75/-75	7.5	0.001	ASTM E1886/ASTM E1996
Inswing SLPS (OXXO)	11'11" X 6'11"	DP50	+75/-75	7.5	0.1	ASTM E1886/ASTM E1996

Energy Performance Rating - Impact Hinged

Door Type	Door Style	Glass Type	Energy Star Climate Zones				U-Factor	SHGC	VT
			North	North Central	South	South Central			
Hinged Impact	Full Lite	LoE ³ 366	*	*	*	*	0.24	0.13	0.30
		LoE ³ 340	*	*	*	*	0.24	0.09	0.18
	3/4 Lite	LoE ³ 366	-	-	-	-	0.29	0.09	0.20

Sound Transmission Class - Impact Hinged

Product Specification	STC	OITC
3080, L Outswing (1" Double Laminated Glass)	35	30
6068, LP Inswing (1" Standard Impact Glass)	34	30
6068, LP Outswing (1" Standard Impact Glass)	34	30

**For Florida Building Code; Texas Department of Insurance & High Velocity Hurricane Zone Approval,

Please see : https://floridabuilding.org/pr/pr_app_srch.aspx

FOLDING

SERIES

The Neuma Folding Door System provides a clean, elegant solution for joining the interior of your home to the outdoors and is available for openings up to 12' wide by 8' tall. With the ability to span various size openings, and multiple configuration and customization options to meet the demands of your project, a Neuma Doors folding door system is the perfect choice.

Energy Efficient

A wide range of glass options provide you with high level comfort and energy savings year-round. The Neuma Doors Folding Door System comes standard with LoE³ 366 glass for optimal energy efficiency.

Built to Last

Our Impact Rated Glass is designed specifically to meet strict requirements for impact, air, water, and structural wind loads. The structural performance and durable hardware of all systems ensures that you can enjoy your folding patio door for years to come.

Security

Multipoint locking systems are standard on all folding door systems to give you security and peace of mind. Top and bottom flush bolts also come standard on the folding door system for added strength and security.

Design Features

Panels feature composite edging and Weather Guard System for advanced moisture protection and maximum durability to withstand the elements. Durable fiberglass skin will not rust, dent, split or rot, ensuring that your family can enjoy your folding door for years to come. For your convenience, the folding door system features a "daily door," a single hinged unit that can be used for daily entry without having to activate all of the panels in the unit. Smooth white interior and exterior finish can be painted to fit any palette and match any style.





1280 Folding Door
Bronze Painted Finish / LoE 366 Glass

FEATURES



- Complete system with frame and integrated hardware
- Features a “daily door” - a hinged single door that can be used for daily entry
- Fiberglass panels with a composite edging and Weather Guard System for advanced moisture protection and maximum durability
- Frames made of waterproof composite material
- Durable fiberglass skins will not rust, dent, split or rot
- Standard LoE³ 366 insulated glass and removable glazing bead for easy glass replacement
- Features smooth white interior and exterior finish
- Available for openings up to 12' wide by 8' tall
- 4-9/16" Frame

CONFIGURATIONS


3 Panel Folding Unit




4 Panel Folding Unit



Three Panel

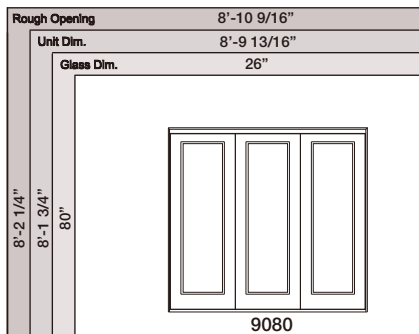

Four Panel

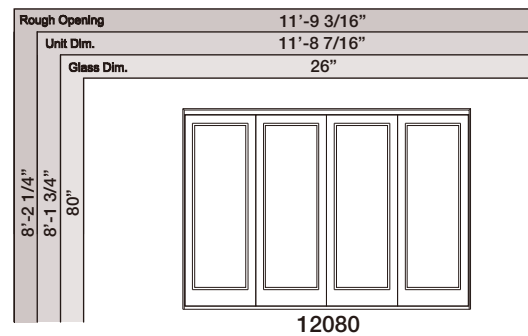

Folding Doors - Impact & Cycle Testing Performance

Product Specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	Test Standard
Outswing PRBJ(1L3R)	11'8" X 8'2"	DP60	+90/-90	9.0	0.005	ASTM E 1886/ASTM E 1996

Folding Doors Outswing - AAMA Test Result (Full Lite Panel)

Product Specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	AAMA101 Standard
9080, 3L/3R	DP60	+90/-90	9.0	0.005	SP-CLASS R-PG60
12080, 3L1R/1L3R	DP60	+90/-90	9.0	0.005	140 7/16" X 97 3/4"

Folding Doors Outswing - AAMA Test Result (Full Lite Panel)

Door Type	Door Style	Glass Type	Energy Star Climate Zones				U-Factor	SHGC	VT
			North	North Central	South	South Central			
Folding Non-Impact	Full Lite	LoE ³ 366	*	*	*	*	0.27	0.16	0.36
Folding Impact	Full Lite	LoE ³ 366	*	*	*	*	0.27	0.16	0.35

GLIDING SERIES

- Panels and frames made of fiberglass and composite material, a part of the Weather Guard System for advanced moisture protection and maximum durability
- Durable fiberglass skins will not rust, dent, split or rot
- Energy Efficient
- Durable polyurethane foam panel core
- Advanced interlocking seal design
- Monorail track for reduced friction
- Adjustable stainless steel tandem rollers
- Removable glazing bead for easy glass replacement
- Door heights available in 6'-8", 6'-11", 7'-10" and 8'-0" sizes
- Frames available in 4-9/16" or 6-9/16" sizes, Net Jamb dimensions are 5-3/4 or 7-3/4 (See pg. 47 for more details)
- Thresholds include drainage systems to channel water away from doors
- Paintable smooth surface or unstained woodgrain are standard with pre-finished options available
- Doors tested for structural stability, water infiltration, air infiltration, forced entry, sound transmission, and energy efficiency





12080 Gliding Full Lite Doors
Smooth White Finish | LoE 366 Glass

FEATURES



1 WeatherGuard
Waterproof Composite
Jambs



2 Advanced Interlocking
Seal Design



3 Waterproof Composite
Edging on all Sides




4 Co-extruded Glazing
Bead



5 Weep Hole



6 Bottom Wind Stopper



7 Adjustable Stainless
Steel Tandem Rollers

Advanced Interlocking Seal Design

Provides superior weather protection.

Optional Retractable Screens

Attractive option that keeps the screen hidden from view when not in use.

Co-extruded Glazing Bead

Designed for easy glass replacement.

Weep Holes

Allow water to drain away from the door while keeping dirt and dust out.

Bottom Wind Stopper

Provides extra weather protection and helps prevent air leakage.

Adjustable Stainless Steel Tandem Rollers

Designed for smooth effortless operation.



12080 Gliding Full Lite Door
Smooth White Finish | LoE 366 Glass

SELECT AND BUILD YOUR OWN GLIDING UNIT



Standard Features Chart

Gliding Door - Standard Features	Gliding 6'8" & 6'11"	Gliding Impact 6'8" & 6'11"	Gliding 7'10" & 8'0"	Gliding Impact 7'10" & 8'0"
Smooth White Interior Finish	•	•	•	•
Smooth White Exterior Finish	•	•	•	•
Standard Handlest in Black, White, Dark Brown, Gold Brass or Satin Nickel	•		•	
HPVD Handleset in Satin Nickel or Gold Brass		•		•
White Sill	•	•	•	•
Single Point Lock	•			
Multi Point Lock		•	•	•
4 9/16" Jamb Width (Net 5-3/4")	•	•	•	•
LoE ³ 366 Glass	•		•	
LoE ³ 366 Laminated Impact Glass		•		•

*** Colors and finishes in this publication are not actual representations.


Gliding Options

Be creative in building a custom large view gliding unit design.

Combo Options



Mull Kits

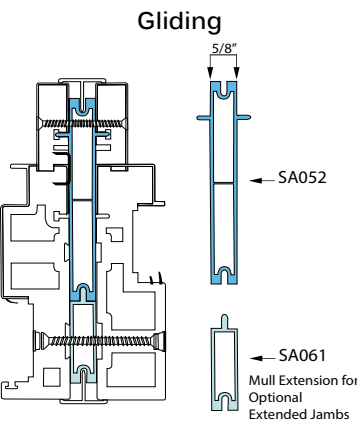


Grille Options


Grilles are used to visually divide the glass area of the door for added architectural detail. Grilles Between Glass (GBG) are aluminum grilles sealed between the two layers of glass and offer an attractive low maintenance option. Simulated Divided Lites (SDL) are applied directly to the glass surface and offer a more traditional appearance. Neuma offers a variety of grille patterns.

Grille Patterns

6'8 & 6'11 Height

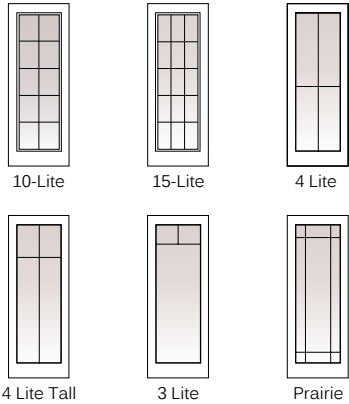

8' Height

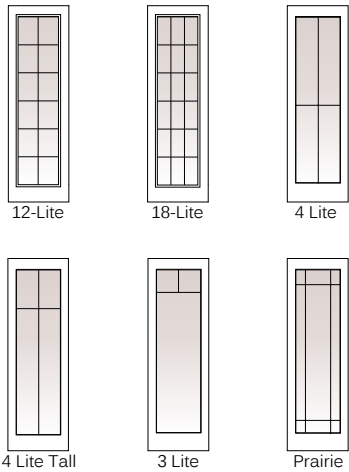

















GLIDING UNIT DIMENSIONS





Full Lite

Single Panel Units

Two Panel Units

Rough Opening	2'-8 1/4"	3'-2 1/4"	4'-2 1/4"	5'	6'	8'
Unit Dim.	2'-7 1/2"	3'-1 1/2"	4'-1 1/2"	4'-11 1/4"	5'-11 1/4"	7'-11 1/4"
Glass Dim.	21 5/16"	27 5/16"	38"	21 5/16"	27 5/16"	38"
6'-8"						
	DGP 2668 (O)	DGP 3068 (O)	DGP 4068 (O)	DGP 5068 (X O)	DGP 6068 (X O)	DGP 8068 (X O)
6'-11"						
	DGP 26611 (O)	DGP 30611 (O)	DGP 40611 (O)	DGP 50611 (X O)	DGP 60611 (X O)	DGP 80611 (X O)
7'-9 3/4"						
				DGP 60710 (X O)		
8'-0"						
	DGP 2680 (O)	DGP 3080 (O)	DGP 4080 (O)	DGP 5080 (X O)	DGP 6080 (X O)	DGP 8080 (X O)


Gliding Jamb

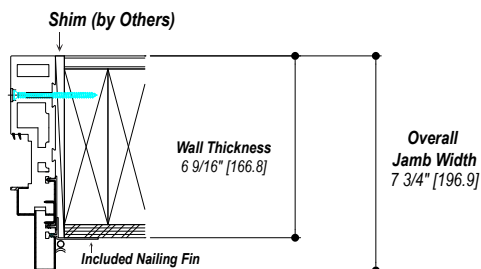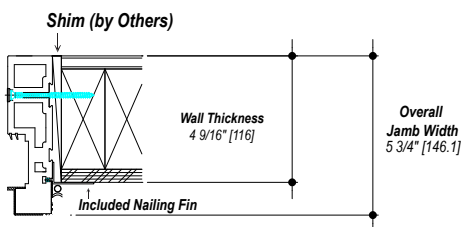

Full Lite

Three Panels Units

Four Panel Units

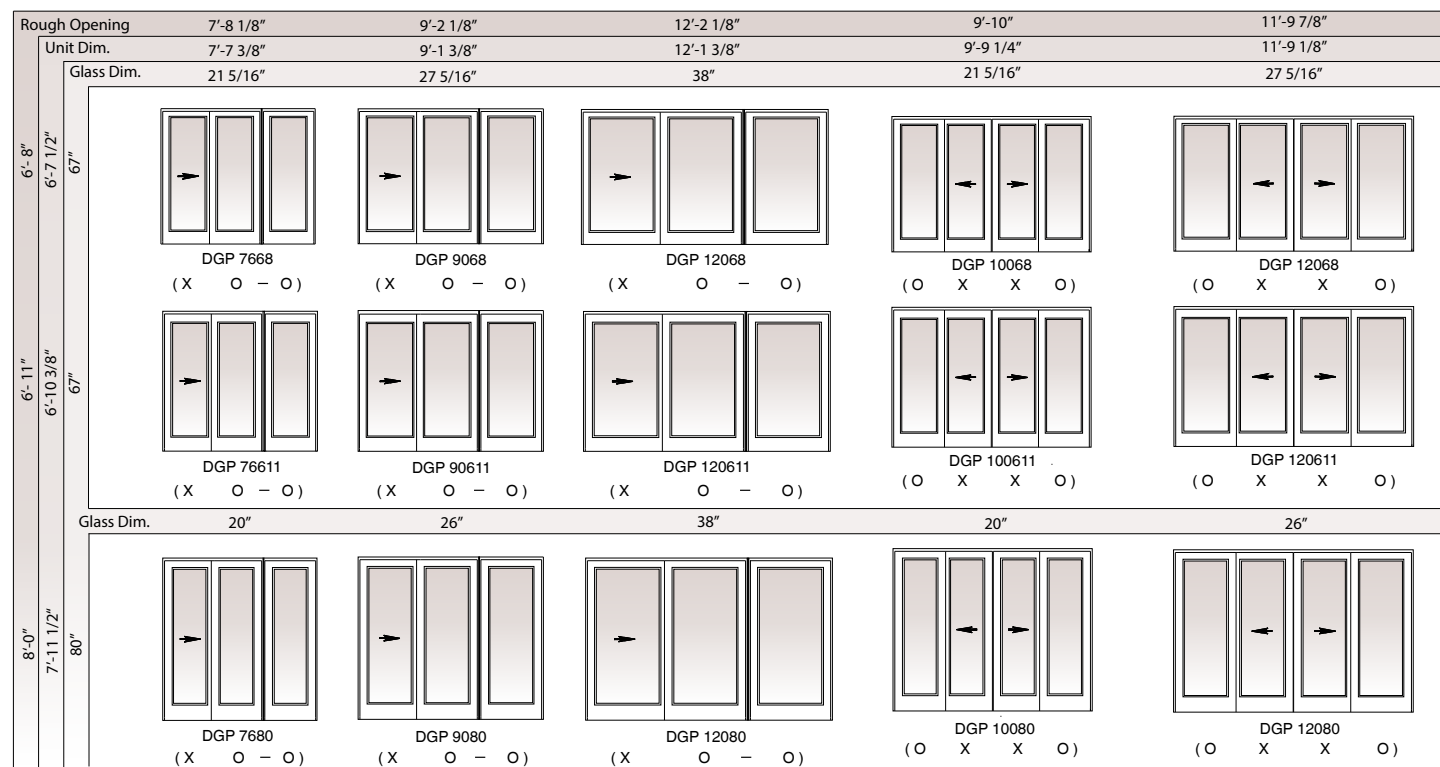

Reference	One Panel	Two Panels	
Handing Call-out	O	OX	XO
Reference Code	S	SR	LS


Reference	Three Panels	
Handing Call-out	XO-O	O-OX
Reference Code	LSS	SSR

Reference	Three Panels	
Handing Call-out	OX-O	O-XO
Reference Code	SRS	SLS

Reference	Four Panels
Handing Call-out	OXXO
Reference Code	SPLS

Mull Kits

Gliding

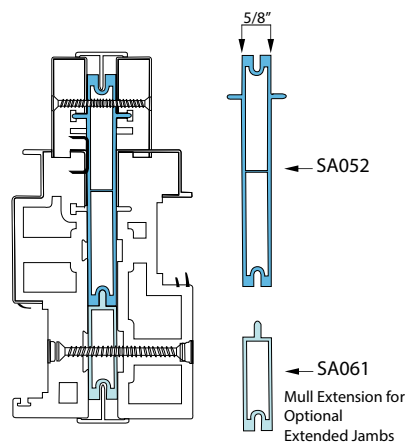


When creating a custom configuration by combining panels and door units, add 5/8" to the unit dimension to allow for the width of the aluminum mull.

- Handing from exterior view
- Doors are not reversible


O = Fixed Panel
X = Active Panel
S = Stationary Panel
DGB = Bypass Gliding

Gliding Panel Specifications

Gliding Patio Doors - Full Lite

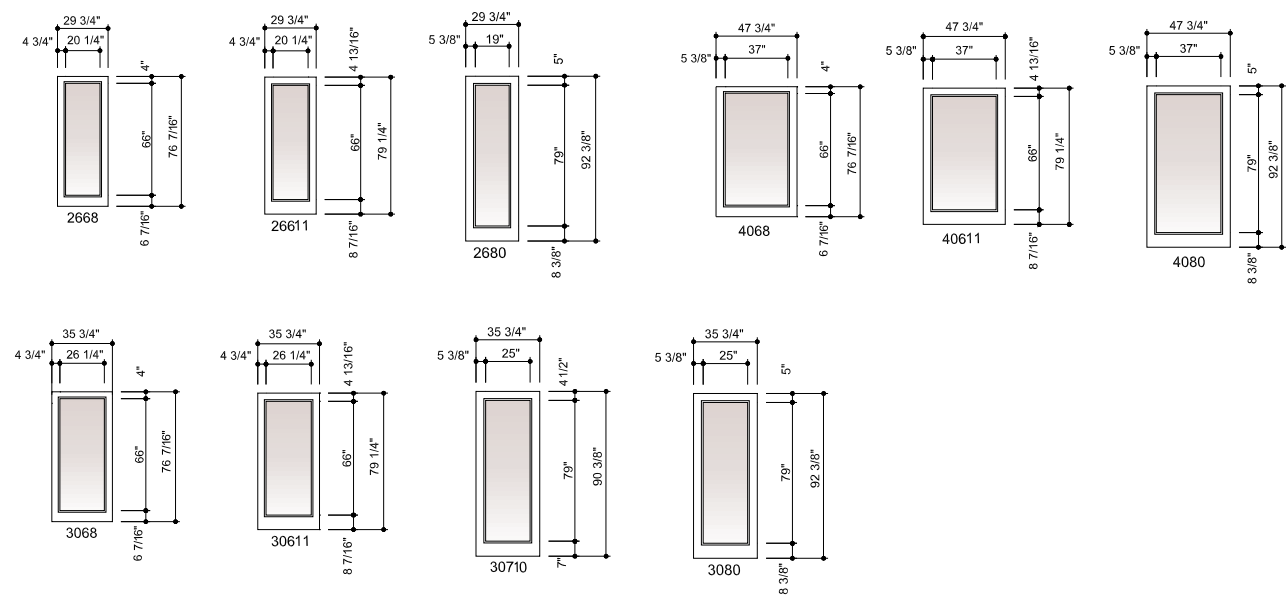

Gliding Patio Doors - 3/4 Lite

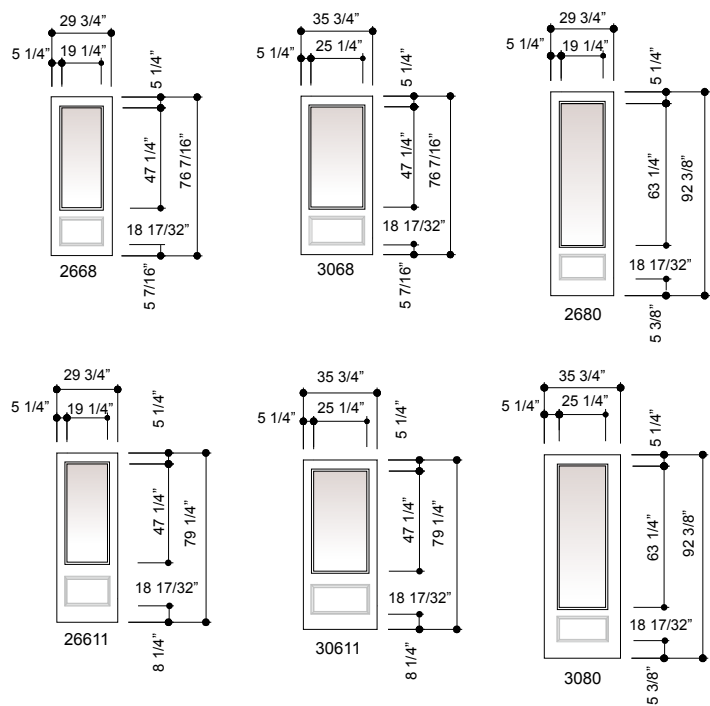



9080 Gliding Full Lite Door
Smooth White Finish | LoE 366 Glass

3/4 Lite Gliding Handing

Single Panel Units

Two Panel Units

Rough Opening		2'-8 1/4"	3'-2 1/4"	5'	6'
Unit Dim.		2'-7 1/2"	3'-1 1/2"	4'-11 1/4"	5'-11 1/4"
Glass Dim.		20"	26"	20"	26"
6'-8"	6'-7 1/2"	 DGP 2668 (O)	 DGP 3068 (O)	 DGP 5068 (X O)	 DGP 6068 (X O)
	48"				
6'-11"	6'-10 3/8"	 DGP 26611 (O)	 DGP 30611 (O)	 DGP 50611 (X O)	 DGP 60611 (X O)
	48"				
Glass Dim.		20"	26"	20"	26"
8'-0"	7'-11 1/2"	 DGP 2680 (O)	 DGP 3080 (O)	 DGP 5080 (X O)	 DGP 6080 (X O)
	64"				













LEGEND

- Handing from exterior view
- Doors are not reversible
- Retractable screen available as an option

O = Fixed Panel
X = Active Panel
S = Stationary Panel
DGP = Gliding Door

Three Panel Units

Four Panel Units

Rough Opening		7'-8 1/8"	9'-2 1/8"	9'-10"	11'-9 7/8"
Unit Dim.		7'-7 3/8"	9'-1 3/8"	9'-9 1/4"	11'-9 1/8"
Glass Dim.		20"	26"	20"	26"
6'-8"	6'-7 1/2"	 DGP 7668 (X O - O)	 DGP 9068 (X O - O)	 DGP 10068 (O X X O)	 DGP 12068 (O X X O)
	48"				
6'-11"	6'-10 3/8"	 DGP 76611 (X O - O)	 DGP 90611 (X O - O)	 DGP 100611 (O X X O)	 DGP 120611 (O X X O)
	48"				
Glass Dim.		20"	26"	20"	26"
8'-0"	7'-11 1/2"	 DGP 7680 (X O - O)	 DGP 9080 (X O - O)	 DGP 10080 (O X X O)	 DGP 12080 (O X X O)
	64"				

* Testing not available

For Single Panel Units For Two Panel Units

For Two Panel Units

For Three Panel Units

For Four Panel Units

Please see :
https://www.floridabuilding.org/pr/pr_app_srch.aspx.

Transom - Non Impact

Transom - Impact

Products | 53

GLIDING TEST RESULTS

Gliding Non-Impact

Full Lite Gliding - Non-Impact AAMA Test Result

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
6068,60611, LS/SR(XO/OX)	DP50	+75/-75	7.5	0.028	SGD-Class R-PG50 142" x 83"
9068, 90611, SSR/LSS (OOX/XOO)	DP50	+75/-75	7.5		
12068, 120611, SPLS (OXXO)	DP50	+75/-75	7.5		
8068, 80611, LS/SR (XO/OX)	DP50	+75/-75	7.5	0.007	SGD-Class R-PG50 146" x 83"
12068, 120611, SRS (OXO)	DP50	+75/-75	7.5		
6080, LS/SR (XO/OX)	DP50	+75/-75	7.5	0.074	SGD-Class R-PG50 142" x 96"
9080, SSR/LSS (OOX/XOO)	DP50	+75/-75	7.5		
12080, SPLS (OXXO)	DP50	+75/-75	7.5		
8080, LS/SR (XO/OX)	DP50	+75/-75	7.5	0.028	SGD-Class R-PG50 146" x 96"
12080, SRS (OXO)	DP50	+75/-75	7.5		

Energy Performance Rating - Gliding Non-impact

Door Type	Door Style	Glass Type	Energy Star Climate Zones				U-Factor	SHGC	VT
			North	North Central	South	South Central			
Gliding Non-Impact	Full Lite	LoE³ 366	*	*	*	*	0.26	0.18	0.40
		LoE³ 340	-	-	*	*	0.27	0.12	0.24

Sound Transmission Class - Non-impact

Product Specification	STC	OITC
6068, LS Gliding (1" Special Non-impact Glass)	30	25
6068, LS Gliding (0.625" Standard Non-impact Glass)	27	23

Sound Transmission Class - Impact Gliding

Product Specification	STC	OITC
6068, LS Gliding (1" Standard Laminated Glass)	32	29
6068, LS Gliding (1" Double Laminated Glass)	33	30

Gliding Impact

Full Lite - Impact & Cycle Testing Performance

Product specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft²)	Test Standard
SRS(OXO)	12'1" X 6'11"	DP50	+75/-75	7.5	0.072	ASTM E1886/ASTM E1996
SRS(OXO)	12'1" X 6'11"	DP50	+75/-75	7.5	0.011	TAS201/202/203
SPLS(OXXO)	11'9" X 6'11"	DP50	+75/-75	7.5	0.01	ASTM E1886/ASTM E1996
SPLS(OXXO)	11'9" X 6'11"	DP50	+75/-75	7.5	0.16	TAS201/202/203
SRS(OXO)	12'1" X 8'0"	DP50	+75/-75	7.5	0.057	ASTM E1886/ASTM E1996
SRS(OXO)	12'1" X 8'0"	DP50	+75/-75	7.5	0.23	TAS201/202/203
SPLS(OXXO)	11'9" X 8'0"	DP50	+75/-75	7.5	0.02	ASTM E1886/ASTM E1996
SPLS(OXXO)	11'9" X 8'0"	DP50	+75/-75	7.5	0.02	TAS201/202/203

Full Lite - Impact & Cycle Testing Performance

Door Type	Door Style	Glass Type	Energy Star Climate Zones				U-Factor	SHGC	VT
			North	North Central	South	South Central			
Gliding Impact	Full Lite	LoE³ 366	*	*	*	*	0.26	0.17	0.39
		LoE³ 340	*	*	*	*	0.26	0.11	0.24

Gliding Patio Doors-Impact & Cycle Testing Performance (3/4 Lite Panel)

Product specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft ²)	Test Standard
SPLS(OXXO)	11'9" X 6'11"	DP50	+75/-75	7.5	0.01	ASTM E1886/ASTM E1996
SPLS(OXXO)	11'9" X 8'0"	DP50	+75/-75	7.5	0.02	ASTM E1886/ASTM E1996

Gliding Patio Doors - Non-Impact AAMA Test Results (3/4 Lite Panel)

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (psf)	Air Infiltration (cfm/ft ²)	AAMA 101 Standard
6068,60611, LS/SR(XO/OX)	DP50	+75/-75	7.5	0.028	SGD-Class R-PG50 142" x 83"
9068, 90611, SSR/LSS (XO/OX)	DP50	+75/-75	7.5		
12068, 120611, SPLS (OXXO)	DP50	+75/-75	7.5		
6080, LS/SR (XO/OX)	DP50	+75/-75	7.5	0.074	SGD-Class R-PG50 142" x 96"
9080, SSR/LSS (XO/OX)	DP50	+75/-75	7.5		
12080, SPLS (OXXO)	DP50	+75/-75	7.5		



12080 Gliding Full Lite Door with Sidelights and Transoms
Smooth White Finish | LoE 366 Glass | 12 Lite SDL

BYPASS

GLIDING SERIES

The Neuma Bypass Gliding Patio Doors are a modern, polished option designed for large openings and available with various finish, glass, and configuration customizations. Unlike hinged doors, they do not require internal or external space to operate, giving you freedom to decorate and style your home without concern about your patio door getting in the way. A bypass door with full lite panels modernizes your space while infusing your space with natural light.

Glass Options

Neuma Bypass Gliding Patio Doors come standard with energy efficient LoE³ 366 glass to keep your home protected from variations in outside temperature while maintaining light and visibility. We also offer impact rated glass options designed specifically to meet requirements for impact, air, water, and structural wind loads. The structural performance and hardware of all systems ensures that your family can delight in your bypass patio door for years to come.

Security

Multipoint locking systems are standard on all 8' bypass gliding door systems to give you peace of mind. All 6'8" and 6'11" bypass gliding doors come standard with single point lock systems, with optional multipoint locks available for added strength and security.

Design and Customization

The bypass door panels feature extended views and ample natural light when closed. When open, they offer a sleek and unobtrusive transition to your outdoor space. Composite edging provides advanced moisture protection. ad maximum durability to withstand the elements . Durable fiberglass skin will not rust, dent, split or rot, ensuring that your family can enjoy your bypass patio door for years to come. HPVD coated handle sets are available in Gold Brass or Satin Nickle to provide additional protection from the elements. The standard smooth white interior and exterior finish can be painted to complement your home's color palette and match any style.






9080 Bypass Gliding Door | Smooth
White Finish | LoE 366 Glass

FEATURES



1 WeatherGuard Waterproof Composite Jambs



2 Advanced Interlocking Seal Design




3 Co-extruded Glazing Bead



4 Weep Hole



5 Bottom Wind Stopper



6 Adjustable Stainless Steel Tandem Rollers




7 Composite One-piece Sill

- Complete fiberglass multi-slide door system with composite frame and integrated Weather Guard System for advanced weather protection
- High performance composite jambs prevent warping, splitting and rotting
- High-Impact fiberglass door skins resist corrosion, rotting or cracking
- Waterproof composite stiles and rails prevent water absorption
- Designed for openings up to 8'10" wide by 8' tall
- Continuous composite header and bottom track sill system
- Standard high-performance LoE³ 366 glass
- DP 50 rated
- Impact option available
- 8-3/16" Frame



9080 Bypass Gliding Full Lite Doors
Black Painted Finish | LoE 366 Glass

BYPASS GLIDING UNIT DIMENSIONS

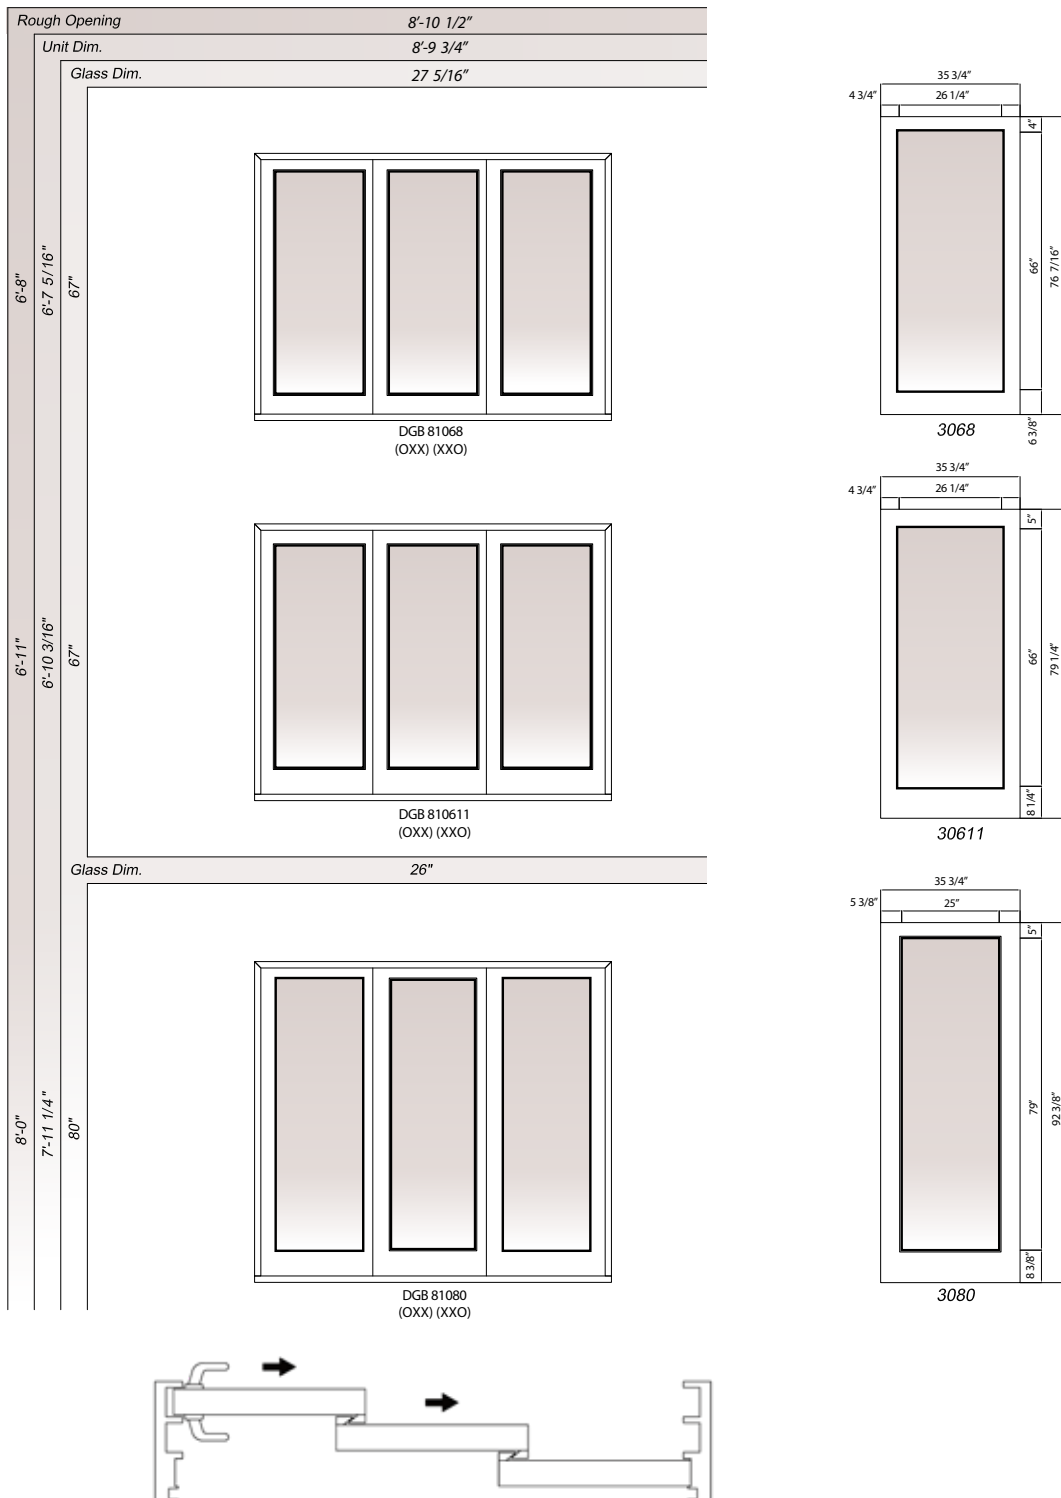

- Handing from exterior view
- Doors are not reversible

O = Fixed Panel
 X = Active Panel
 S = Stationary Panel
 DGB = Bypass Gliding

BYPASS GLIDING TEST RESULTS

Bypass Gliding - Non-Impact AAMA Test Results

Product specification	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft²)	AAMA 101 Standard
LPS (XXO)_no sill riser	DP50	+75/-75	6.0	<0.01	SD-CLASS R-PG50 106" x 82"
LPS (XXO)_with sill riser	DP50	+75/-75	7.5		
LPS (XXO)_no sill riser	DP50	+75/-75	6.0	<0.01	SD-CLASS R-PG50 106" x 95.5"
LPS (XXO)_with sill riser	DP50	+75/-75	7.5		

Bypass Gliding - Impact & Cycle Testing Performance

Product specification	Max. Testing Dimension	Design Pressure Rating	Structure Performance (psf)	Water Resistance (PSF)	Air Infiltration (cfm/ft²)	Test Standard
LPS (XXO)_no sill riser	106" x 82"	DP50	+75/-75	6.0	<0.1	ASTM E1886 / ASTM E1996
LPS (XXO)_with sill riser	106" x 82"	DP50	+75/-75	7.5		
LPS (OXXO)_no sill riser	106" x 95.5"	DP50	+75/-75	6.0	<0.1	ASTM E1886 / ASTM E1996
LPS (OXO)_with sill riser	106" x 95.5"	DP50	+75/-75	7.5		

Energy Performance Rating - For Gliding Patio Doors Impact

Door Type	Door Style	Glass Type	Energy Star Climate Zones				U-Factor	SHGC	VT
			North	North Central	South	South Central			
Bypass Gliding Non-Impact	Full Lite	LoE³ 366	*	*	*	*	0.26	0.18	0.40
		LoE³ 340	-	-	*	*	0.27	0.12	0.24
		LoE³ Blinds	-	-	-	-	0.29	0.36	0.41
Bypass Gliding Impact	Full Lite	LoE³ 366	*	*	*	*	0.26	0.17	0.39
		LoE³ 340	*	*	*	*	0.26	0.11	0.24

*For all product testing approval numbers and information, please visit <http://www.neumadoors.com/resource>

**For Florida Building Code; Texas Department of Insurance & High Velocity Hurricane Zone Approval,

Please see : https://floridabuilding.org/pr/pr_app_srch.aspx



8068 Double Hinged Vented Sidelight Door with Transom
Smooth White Finish | LoE 366 Glass



Transom & Sidelight

Options

Enhance the look of your door and brighten your space with transoms and sidelights.

Transom windows above the door add charm and character and allow light to pass while, maintaining your privacy. Neuma Doors offers transoms in a variety of sizes and styles for both hinged and gliding door styles. With an array of divided light patterns, you can design the transom to compliment the style of your home and patio door.

- * Net Jamb dimensions are 5-3/4" and 7-3/4"
- * Shipped unstacked (not mullied)
- * Transoms are tested separately from door unit.

Sidelights visually open up the doorway and increase the ambient light and access to the outdoor views. Choose from our expansive offering of sidelights for both hinged and gliding doors. For added fresh air ventilation, select the Vented Sidelight option which features fully operable sidelights with multi-point locks and stationary screens.



*** Colors and finishes in this publication are not actual representations.



6080 Double Hinged Full Lite Door with Transom
Bronze Painted Finish | LoE 366 Glass


*** Colors and finishes in this publication are not actual representations.

BUILD YOUR OWN COMBINATION


Typical Sidelight and Transom Combinations

Combination with mull kit

Gliding Series

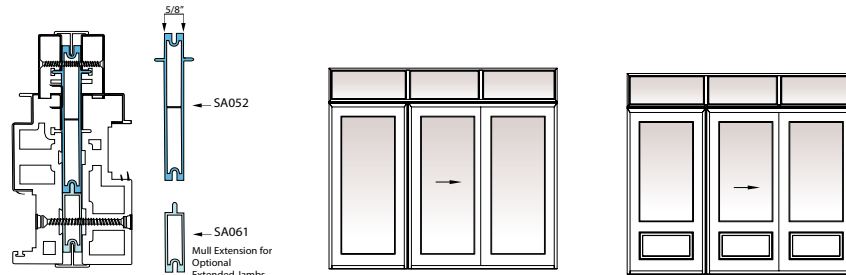


Hinged Series

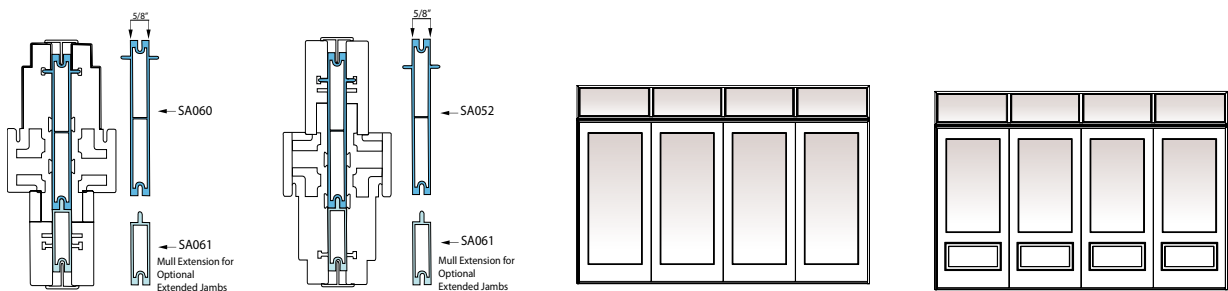


Combination with mull post and continuous sill




Transom Mull Kit

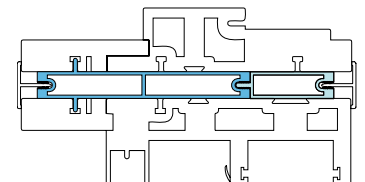


Gliding

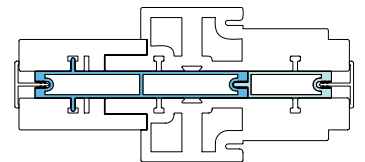

Inswing Hinged

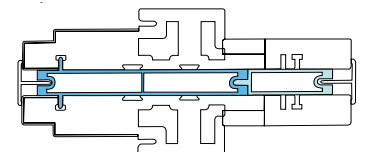

Outswing Hinged



Hinged Units are available only on inswings

Gliding Units are available in OXXO 12ft Units



6080 Double Hinged Full Lite Door
LoE 366 Glass | 4 Lite Tall SDL

2880 Single Hinged Full Lite Door
LoE 366 Glass | 4 Lite Tall SDL

GLAZING OPTIONS

Standard Insulated Glass

The insulating effect of your doors has a direct impact on how your rooms feel. Our glazing options provide not only a beautiful entry, but also a reliable barrier against the heat and damaging rays of the hot sun. Each double pane LoE366 glass option provides Argon gas filled insulation to prevent the transfer of heat, keeping heat in during the winter and out during the summer. Available LoE366 glass options are designed to reflect ultraviolet light, not only keeping interiors cooler or warmer, but also protecting interior furnishings from fading. Warm edge spacers help to keep the panes at the correct distance apart while reducing heat flow and preventing condensation.



Argon filled units for energy efficiency

LoE366 glass

Standard LoE366 glass, Ultimate performance glass


An unprecedented 3 layers of silver and Argon gas fill results in a clear coating that blocks the solar heat gain, reflects heat and lets the light stream in giving you the ideal balance of solar control and high visibility. LoE366 is also the perfect choice for cold weather climates, helping to keep higher interior glass temperatures in cold weather, dramatically improving any thermal discomfort from the cold outside air.

Optional LoE340 glass, Glare back at the sun

The solution to solar glare and thermal discomfort starts with LoE³ 340 glass with Argon gas fill. Uncontrolled sunlight can be an offender by bringing thermal discomfort and creating visual glare. LoE³ 340 glass provides a great combination of aesthetic appeal along with energy savings and indoor comfort.

Optional Insulated Laminated Impact Glass

Laminated glazing offers the greatest protection from life's storms. Neuma Doors impact glazing gives you and your home the best level of security and assurance. During windstorms and hurricanes, wind borne wreckage can impact windows, with gusting, pervasive winds to follow. The broken glass fragments adhere to the interlayer and maintain the home's defense from the wind, rain and forced entry.



Optional Grilles Between Glass (GBG)

Flat white $\frac{3}{4}$ " grilles between two layers of glass are available by special order.



Optional Simulated Divided Lites (SDL)

Simulated divided lites give you the classic look and feel of a true divided lite door. 100% composite SDL bars are fixed directly to the glass and can be ordered with or without Grilles Between the Glass. $\frac{7}{8}$ " SDL bars are available for $\frac{5}{8}$ ", $\frac{3}{4}$ " and 1" glaze options in both smooth and woodgrain textures in finishes to match the door's finish.

Custom Glass Options such as Translucent glass and Rain glass are available through special order.



12080 Double Opening Gliding Patio
Black Painted / Special Order LoE Black Miniblind
*Black Blinds Available in select sizes



BLINDS

Between The Glass

Available in either Clear or LoE options, Blinds Between the Glass feature a cordless tilt, raise and lower operation. The mini-blinds are sealed between 2 panes of glass within the door and provide several key benefits.

CLEANLINESS

No accumulation of dust or allergens.

SAFETY

No hanging cords or operators and provide maximum safety protection for children and pets.

PRIVACY AND LIGHT CONTROL

Flexibility to adjust to your desired level of privacy and sunlight. Raise the blinds completely for maximum sunlight and an unobstructed view or close completely for privacy.

DURABILITY

Blinds stay protected from damage behind the glass and away from curious little fingers and paws.

LoE BLINDS

The LoE Blinds Between the Glass option are built with LoE glass that improves the energy efficiency of the door. The one operator control system provides raise, lower AND tilt options in one sleek operator design.



*Blinds not available in 3/4 lite panels

*** Colors and finishes in this publication are not actual representations.

FINISH OPTIONS

Pre-Finish Options



Unstained




Golden Oak




Medium Oak

























Dark Mahogany



Black Paint Finish



Bronze Paint Finish

	Standard Finish. Standard finish on all of Neuma's Patio Doors.		Available Pre-finished Options Neuma customers can have their patio doors customized with the following pre-finished combinations. There is an additional 8-10 week turnaround time on all orders.								
Color Code	002	300	3N2	3MF	3M2	3RF	3R2	3KF	3K2	2B2	2A2
Interior	*  Smooth	 Unstained	 Unstained	 Dark	 Dark	 Golden	 Golden	 Medium	 Medium	 Black	 Bronze
Exterior	*  Smooth	 Unstained	*  Smooth	 Dark	*  Smooth	 Golden	*  Smooth	 Medium	*  Smooth	 Black	 Bronze

* The smooth white is not a finished face.



6068 Double Hinged Full Lite Door
Medium Oak Finish | LoE 366 Glass | 6 Lite SDL



Customize your door with a black standard paint finish. The paint finish program is only applicable to smooth white doors and includes the painted finish on both the interior and exterior sides of the door. Paint finish on only one side of the door or a paint color other than black is a special order and may be subject to a minimum order quantity.

There is additional turnaround time for all painted finish orders. This option saves time and money by eliminating the need for finishing on site.

*** Colors and finishes in this publication are not actual representations.

12080 Double Hinge Full Lite Door with Fixed Sidelites
Black Paint Finish | LoE 366

HARDWARE

Standard Hinged Hardware

- Single Point Lock Systems are standard on 6'8" and 6'11" doors
- Multi Point Lock Systems are standard on 7'6" & 8'0" doors
- Handle Sets are available in your choice of color and style

Hardware Options

- Multi Point Lock Systems are optional on 6'-8" and 6'-11" doors.
- Multi-lock plate and strike plates are available in gold brass and satin nickel finishes only.
- HPVD (High Physical Vapor Deposition) coated handle sets are available in the Royal Style handle set in Gold Brass or Satin Nickel colors. The HPVD coating provides additional protection in harsh environments. HPVD coating requires proper maintenance. **See maintenance guide for proper care instructions.**



Dark Brown

White

Tiffany Series



White

Black

Dark Brown

Gold Brass

Satin Nickel

(Powder Coated)

Royal Series



White

Black

Dark Brown

Gold Brass

Satin Nickel

(Powder Coated)

Standard Lock System



Standard Single
6'8" & 6'11"

Precision-engineered entry spring latch and dead bolt lock design standard on Neuma's 6'8" and 6'11" door units.

Optional Multi Point Lock System for 6'8, 6'11"



Optional Multi-Point Lock
6'8" & 6'11"

Stainless steel strike plates provide excellent corrosion resistance, enhanced performance, smooth operation, and the best security value.

Standard on our 7'6" & 8'0" doors



Standard Multi Point Lock
System for 7'6" & 8'0"

Neuma's 7'6" & 8'0" doors come standard with our multi-point lock system. Unique to our 7'6" & 8'0" hinged door units, it features a 3 hook lock and keeper design to maintain the highest level of security.



Black



Satin Nickel

Standard Handleset Choices



Gold Brass



Satin Nickel



Dark Brown



Black



White

(Powder Coated)

Standard Gliding Hardware

- Single Point Lock Systems are standard on 6'8" and 6'11" doors
- Multi Point Lock Systems are standard on 7'10" and 8'0" doors
- White Sills are standard on all doors
- Handle Sets are available in your choice of color

Hardware Options

- Multi Point Lock Systems are optional on 6'-8" and 6'-11" doors
- Multi-lock plate and strike plates are available in gold brass and satin nickel finishes only.
- HPVD (High Physical Vapor Deposition) coated handle sets are available in Gold Brass or Satin Nickel colors. The HPVD coating provides additional protection in harsh environments. HPVD coating requires proper maintenance. **See maintenance guide for proper care instructions.**
- Straight exterior handle in Satin Nickel finish set is available as an option (straight handle set not compatible with blinds between glass option)



*Straight Handleset Option

- Exterior option only
- Only available with a Satin Nickel finish

Standard Single Point Lock System for 6'8", 6'11"



Standard Single 6'8" & 6'11"

Precision-engineered single mortise hook-style lock and keeper come standard on Neuma's 6'8" and 6'11" door units.

Optional Multi Point Lock System for 6'8", 6'11"



Optional Multi-Point Lock 6'8" & 6'11"

Stainless steel strike plates provide excellent corrosion resistance, enhanced performance, smooth operation, and the best security value.

Standard on Our 7'-10" & 8'-0" Doors



Standard Multi Point Lock System for 7'6" & 8'0"

Neuma's 7'-10" & 8'0" doors come standard with our multi-point lock system. Unique to our 7'-10" & 8'0" gliding door units, it features a 3 hook lock and keeper design to maintain the highest level of security.




6080 Double Hinged Full Lite Doors
Smooth White Finish | LoE 366 Glass | 3 Lite SDL

ADDITIONAL OPTIONS - SOLD SEPARATELY

Screens

- Our retractable screens can be used in most of our patio Door Systems: Inswing, Outswing, Center Hinged and Gliding.
- Available for single and double door units.
- Screenshot with individual lock plunger to open each door with ease. No magnets.
- Screen option not available for any unit with ADA sill.

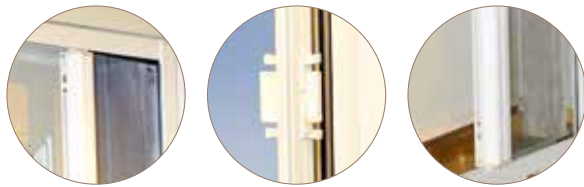

Screen doors provide the perfect solution when you want maximum airflow and light infiltration while keeping bugs out of your home. On temperate days, screen doors allow you to enjoy the outdoor weather without the hassle of pesky insects. Enjoy the sunlight, the summer breeze, and the sounds of nature of your outside space while maintaining an indoor space free of unwelcome critters.

Our classic screen door sits in its own track and slides out of the way when the door is in use. The screen can be closed when the main door is open to provide airflow and passage of light while deterring outdoor pests. When pushed aside, the screen door sits in front of the stationary panel to allow uninhibited use of the main door.

For a low-profile, modern look try our vanishing screen. When engaged, the screen covers the door opening to allow fresh air and sunlight into your home. When you are ready to disengage the screen, it retracts completely, rolling into its canister. The vanishing screen is perfect if you want the flexibility of a screen door without the commitment to the look of a more traditional style screen door.



Retractable
Screen



Standard
Gliding
Screen

Brickmold Options




Smooth White

Brickmold fills the gap between the exterior facing of a building and the doorframe and serves as a visual border between the masonry of the home and the door. Available in a variety of profiles to complement any architectural style, brickmold adds charm and curb appeal to the home.



Unstained Woodgrain

Whether for new construction or renovation, Neuma Doors allows you to customize your new door by selecting one of our brickmold options. Neuma Doors offers brickmold in unstained woodgrain or smooth white texture. Our brickmold is both stainable and paintable, allowing you to match your new brickmold with existing shutters, siding, or trim on your home and make a stunning impact.

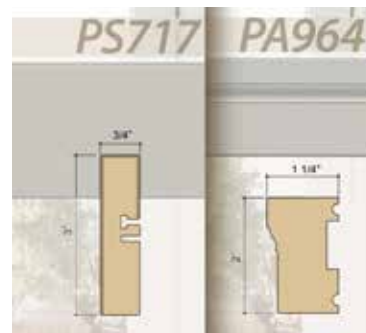

PRODUCT DETAILS CHART

Feature	Full Lite Hinged Doors	3/4 Lite Hinged Doors	Vented Sidelight Doors	Folding Doors	Full Lite Gliding Doors	3/4 Lite Gliding Doors	Bypass Gliding Doors
Operation	Inswing, Outswing	Inswing, Outswing	Inswing	Outswing	Gliding	Gliding	Gliding
Skin Material	Fiberglass	Fiberglass	Fiberglass	Fiberglass	Fiberglass	Fiberglass	Fiberglass
Skin Texture	Oak Grain or Smooth	Mahogany Grain or Smooth	Oak Grain or Smooth	Smooth	Oak Grain or Smooth	Mahogany Grain or Smooth	Smooth
Exterior Finish	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Painted or Smooth	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Painted or Smooth White
Interior Finish	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Painted or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Stained, Painted, Unstained Woodgrain, or Smooth White	Painted or Smooth White
Frame Material	Composite	Composite	Composite	Composite	Composite	Composite	Composite
Height Options	6'8", 6'11", 7'6", 8'0"	6'8", 6'11", 8'0"	6'8"	8'0"	6'8", 6'11", 7'10", 8'0"	6'8", 6'11", 8'0"	6'8", 6'11", 8'0"
Width Options	2'2-1/16", 2'6-5/8", 2'8-5/8", 3'0-5/8" panel widths	2'6-5/8", 2'8-5/8", 3'0-5/8" panel widths	5'-10", 7'-10" overall unit widths	9', 12" overall unit widths	2'7-1/2", 3'1-1/2", 4'-1-1/2" panel widths	2'7-1/2", 3'1-1/2" panel widths	8'-9 7/8" overall unit width
Panel Options	1,2 or 3 panels	1,2 or 3 panels	3 or 4 panels	3 or 4 panels	1,2,3 or 4 panels	1,2,3 or 4 panels	3 panels
Sidelite Width Options	1'0", 1'2", 1'11-1/4"	1'2"	Included with unit	Not Available	Not Available	Not Available	Not Available
Glass Options	LoE ³ 366, LoE ³ 340, Clear, Blinds, LoE Blinds, SDL, GBG	LoE ³ 366, LoE ³ 340, SDL, GBG	LoE ³ 366, LoE ³ 340, Clear, Blinds, LoE Blinds, SDL, GBG	LoE ³ 366, LoE ³ 340, SDL, GBG	LoE ³ 366, LoE ³ 340, Clear, Blinds, LoE Blinds, SDL, GBG	LoE ³ 366, LoE ³ 340, SDL, GBG	LoE ³ 366, LoE ³ 340, SDL, GBG
Sill Width Options	4-9/16", 6-9/16" Net 5-3/4", 7-3/4"	4-9/16", 6-9/16" Net 5-3/4", 7-3/4"	4-9/16", 6-9/16" Net 5-3/4", 7-3/4"	4-9/16" Net 5-3/4"	4-9/16", 6-9/16" Net 5-3/4", 7-3/4"	4-9/16", 6-9/16" Net 5-3/4", 7-3/4"	8-3/16"
Multi-Point Lock	Standard on Impact, 7"6" and 8' doors, Optional on 6'8", 6'11" doors	Standard on Impact and 8' doors, Optional on 6'8", 6'11" doors	Standard for sidelites, Optional for operable door(s)	Standard	Standard on Impact, 7'10" and 8' doors, Optional on 6'8", 6'11" doors	Standard on Impact and 8' doors, Optional on 6'8", 6'11" doors	Standard
Sidelight Mull Options	Available	Available	Included	Not Available	Available	Available	Not Available
Transom Mull Options	Available	Available	Available	Not Available	Available	Available	Not Available
Screens *Option not available for units with ADA Sill	Vanishing Screen Available	Vanishing Screen Available	Standard for sidelites, Optional for operable door(s)	Not Available	Standard and Vanishing Screen Available	Standard and Vanishing Screen Available	Not Available
*Residential Limited Warranty	*Limited Lifetime	*Limited Lifetime	*Limited Lifetime	*Limited Lifetime	*Limited Lifetime	*Limited Lifetime	*Limited Lifetime
*Multi-Family Commercial Warranty	*10 Years	*10 Years	*10 Years	*10 Years	*10 Years	*10 Years	*10 Years

* Warranty Exclusions apply. For full warranty information, exclusions, limitations, and warranty service request procedures, please visit

DOOR DESIGN SPECIFICATIONS

Hinged Doors

Standard Features

- Standard hinged door units come with smooth white interior and exterior or unstained woodgrain interior and exterior, LoE³ 366 glass, stainless steel hinges and 4-9/16" (Net 5 3/4") jambs.
- Single-point locks standard on 6'8" and 6'11" height doors.
- Multi-Point locks standard on all 7'6" and 8'0" height doors.
- All units that measure over 9' in width are shipped knock-down (KD).

General Information

- Gold brass and dark brown handlesets come with matching sills and brass strike plates. Satin nickel and white handlesets come with an aluminum sill and strike plates.
- Unfinished hinged doors come with a matching paintable/stainable sill.
- Extended 6-9/16" (Net 7-3/4") jamb options available.

Folding Doors

Standard Features

- Folding door units come with smooth white interior and exterior LoE³ 366 glass and 4-9/16" (Net 5 3/4") jambs.
- Standard multi-point locks.
- All folding door are shipped knock-down (KD).

Gliding Doors

Standard Features

- Standard gliding door units come with smooth white interior and exterior or unstained woodgrain interior and exterior, LoE³ 366 glass and 4-9/16" (Net 5 3/4") jambs.
- Single-point locks standard on all 6'8" and 6'11" height doors.
- Multi-point locks standard on all 7'10" and 8'0" height doors.
- All units that measure over 9' in width are shipped knock-down (KD).

General Information

- Unfinished gliding doors come with a matching, paintable sill and stainable. All other gliding doors come with a white sill.
- Extended 6-9/16" (Net 7-3/4") jamb options available.

Bypass Gliding Doors

Standard Features

- Standard bypass door units come with smooth white interior and exterior, and LoE³ 366 glass
- Standard single point locks on all 6'8" and 6'11" height doors
- Standard multi-point locks on all 8'0" height door
- Continuous header and sill system
- All bypass gliding units are shipped knock-down (KD)
- 8-3/16" jamb

Impact Doors

Impact Rated Doors

- Impact door options come standard with smooth white interior and exterior or unstained woodgrain interior and exterior,

LoE³ Impact 366 glass, stainless steel hinges, 4-9/16" (Net 5 3/4") jambs Mutli-point locks and HPVD coated handlesets.

- HPVD coated handle and lock set are only available in the Royal Series style in choice of satin nickel or gold brass finishes.HVHZ Impact
- HVHZ impact rated units are tested under TAS 201, 202, 203.
- HVHZ impact rated doors are assembled with reinforced fiberglass panels.

Vented Sidelight

Standard Features

- Vented Sidelight standard units come with smooth white interior and exterior or unstained woodgrain interior and exterior, LoE³ 366 glass, stainless steel hinges, and 4-9/19" (Net 5 3/4") jambs.
- Standard dead bolt and latch on the main door and multi-point locks on the sidelights are standard.
- Fixed screens on the sidelights are standard.

General Information

- Multi-point locks on the main door are available as an option.
- Vented sidelights are available in 6'8" height only.
- Vented sidelight units available as inswing door only.

Transoms

- Transoms are available to compliment many door configurations.
- Available for both hinged and gliding doors
- Net jamb dimensions are 5-3/4"
- Transoms are tested independently from the door unit.
- Transoms are not factory mulled to the door unit. It is the sole responsibility of the installer to follow proper installation instructions.
- Transoms with grid patterns are available. It is the sole responsibility of the distributor to provide correct order information for proper grid alignment between the transom and the door.

Blinds

- Mini blinds available in Clear and LoE options.
- Mini blinds option is not available with impact glass, or 3/4 lite panel options.

Screens

- Screen options not available for any door unit with ADA Sill.




6080 Double Hinge Full Lite with 8 Lite SDL + 6020 Transom
with 4 Lite SDL
White Finish | LoE 366 Glass

HANDING GUIDE

Hinged Doors


Single Doors

Exterior View

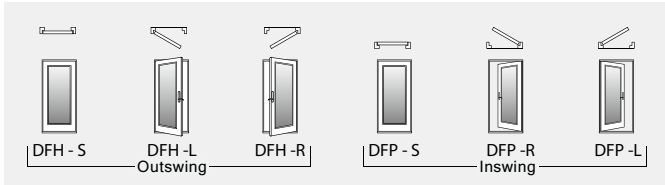


Double Hinged Doors (2 panel)

Exterior View

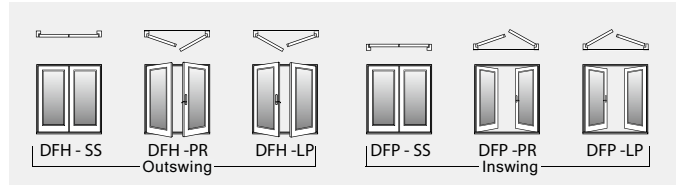


Center Hinged Doors (2 panel)

Exterior View

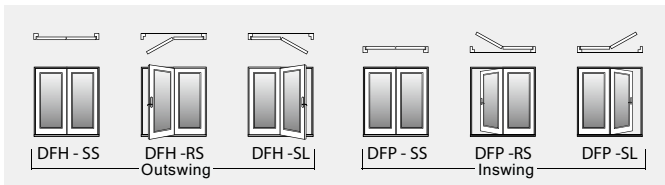


Center Hinged Doors (3 panel)

Exterior View

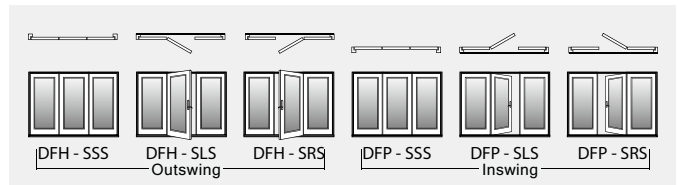

Inswing Vented Sidelight - 6'8" Retro Fit


Exterior View

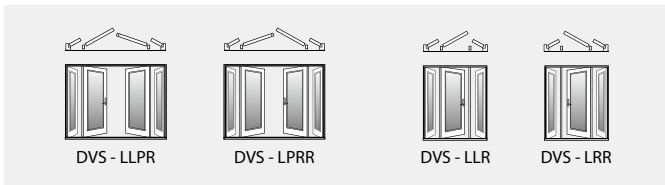


*** S = Stationary
R = Hinge at right side exterior view
L = Hinge at left side exterior view
DFP = Inswing
DFH = Outswing

Folding Doors

Configuration for 3 Panel Door

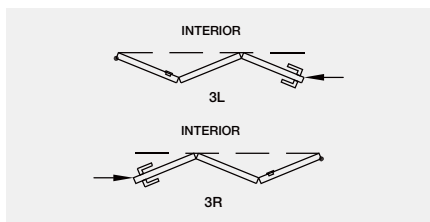


Configuration for 4 Panel Door

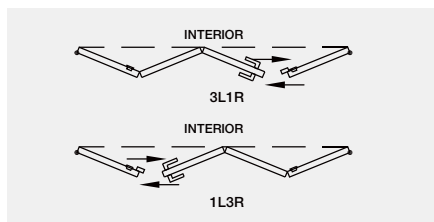

Gliding Doors

Gliding Doors

Exterior View

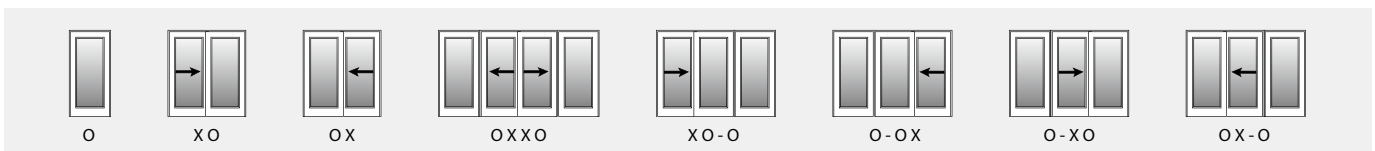

Bypass Gliding Doors

Exterior View



DGP = Gliding Door
O = Fixed Panel
X = Active Panel
S = Stationary Panel

Reference	One Panel		Two Panels	
Handing Call-out	O	OX	XO	
Reference Code	S	SR	LS	

PAINTING GUIDE



MATERIALS NEEDED

1. Scotch Brite Pad (Fine) or 320-400 grit sandpaper.
2. For water-based application: Acrylic primer/acrylic latex-based exterior grade paint.

*** We recommend using "Sherwin Williams PrimeRX® Peel Bonding Primer" with compatible acrylic-latex paint for optimal paint adhesion.

STEP 1: SURFACE PREPARATION

1. Remove all the hardware and mask off anything you don't want painted.
2. Lightly scuff sand the surface with a Scotch Brite pad or fine sandpaper.
3. Wipe the door with acetone to clean any dust or residue from the surface. Allow acetone to dry from the surface before applying primer.
4. Do not use hydrocarbon based solvents to clean the surface as such products may leave a residue.
5. Apply primer with a paint brush. Follow the manufacturer's instructions for drying time before applying topcoat. Continue to apply primer to all 6 sides, include bores and mortises.
6. The primer must be completely dry before applying the topcoat.

STEP 2: PAINTING

1. Apply exterior grade paint with a paint brush.
2. It is common practice to paint both stiles the same color as the exterior side of the door. If applying a second coat, follow the manufacturer's instructions for drying time between coats.

3. Continue to apply the topcoat to all 6 sides. Door panels which have been bored and mortised for hardware should be finished inside of the lock bore as well.

CAUTION

1. Painting Neuma Doors dark colors can result in poor performance. Dark colors are considered any color that falls within the lightness (L) value of 56 to 0. Where 100 is white and 0 is black. Use paint with a light reflective value (LRV) of 57 units or greater.
2. When using stains, mineral spirits, paints, or other hazardous materials, always read and follow the manufacturer's instructions. Neuma Doors makes no representations as to the proper use of other manufacturers' products.
3. When working with paints or solvents, make sure the working area is well ventilated.
4. Keep away from heat and flame as materials may be combustible.
5. Paints or solvents may cause skin and eye irritation. Avoid contact with skin and eyes.
6. Keep out of reach of children.

Maintenance

All well-finished fiberglass doors will be affected by exposure and weathering from sun, moisture, and air pollutants. It is considered normal maintenance to re-apply the topcoat approximately every two years.

STAINING GUIDE

MATERIALS NEEDED

1. Pre-Mixed Stain (1/2 pint)
2. Mineral Spirits (4 fl. oz.)
3. Top Coat/Sealer (20 fl. oz.)
4. Two Clean Cloths
5. One Pair Protective Gloves
6. 3" China Bristle Brush
7. Two Stir Sticks
8. Finishing Instruction



STEP 1: SURFACE PREPARATION

1. If possible, lay door horizontally on a padded surface to prevent scratches.
2. Remove all the hardware and mask off anything you don't want stained.
3. DO NOT SAND WOODGRAINED COMPOSITE.
4. Wipe the door with mineral spirits to clean any dust or residue from the surface. Allow door surface to dry completely before applying stain.

STEP 2: STAIN APPLICATION

Apply stain with a 3" to 4" soft bristle brush, or rag to small sections of the door at a time.
Apply enough stain to fill the door grain.

With a clean, lint-free 24 x 24 inch cloth, softly wipe the surface until you reach your desired tone.

TIP: When the rag becomes saturated with stain, re-fold to work with a less-saturated section. Be sure to use the same rag for the whole door.

After all the stain is brushed evenly you may add finishing touches by using a small 1" to 2" brush or cotton swabs. Additional coats may be applied to achieve desired look. Follow all stain manufacturers instructions for proper application (if different) and compatibility information.

STEP 3: PROTECTIVE TOP COAT

Application of a polyurethane top coat with UV inhibitors like ZAR™ Exterior polyurethane, Wood Kote® Flagship UV, or Minwax® Fast Drying Polyurethane for exterior applications.

1. After stain has completely dried (48 hours), mix the top coat well and apply evenly using a clean dry 2" soft bristle brush or 3" foam brush. Be sure to stop when the grain changes direction.
2. Apply two or three coats of finish, allowing at least 24 hours of drying time between each application.

MAINTENANCE

Even a well-finished door will be affected by exposure and weathering from sun, moisture, and air pollutants. It is considered normal maintenance to re-apply the topcoat approximately every two years. Due to the variability in finishing materials, application conditions and techniques, all of which are beyond the control of Neuma Doors, Neuma cannot be responsible for the performance of field applied finishes or individual application techniques.

* Staining instructions are for Oil-Based, Premium Quality Stains or similar product designed for use on fiberglass. Please note the instructions indicated are specific to the Zar brand stain.
Please reference stain manufacturers instructions before applying any stain.

OXIDATION/CHALKING CLEANING GUIDE



Composite and fiberglass products are low-maintenance and easy to care for, they will perform their best with some occasional attention. In rare cases, products can be affected by solar energy or chemicals that can cause a change in color - including fading, darkening or yellowing. In most climates and with many mild chemicals, a change may not even be noticed. In other cases, however, the color change may be more dramatic and become cause for concern.

A chalky white substance on your patio doors panels may be caused by oxidation, which occurs most often during damp or wet weather. Oxidation can be cleaned from most doors, but the process can be time-consuming and labor-intensive.

Suggested cleaning and maintenance

1. Rinse with a light spray of water to remove dust, dirt and debris. Use a garden hose and spray the water downward to avoid getting any beneath the door panels, where it can damage the floor beneath.
2. Wear safety glasses to avoid spraying cleaning solution into your eyes as you work. Mix 5 cups of vinegar into 1 gallon of hot water, and pour some of this solution into a spray bottle.



3. Apply the vinegar and water solution onto a small section of trim and scrub with a long-handle, soft-bristle cleaning brush. Work from the bottom of the trim up to avoid streaking. Sections of about 10 feet or less are usually easier to work with than larger sections, because the vinegar and water solution won't have time to dry on the panels before you rinse.
4. Hose off the trim with a gentle spray of clean water, again spraying downward.
5. Continue to spray and scrub the oxidation until you have cleaned all of the trim. Use a ladder to reach sections of trim on the upper levels of your home.
6. HPVD handlesets should be wiped down with a non-abrasive, clean, damp cloth once a month. The protective coating on the HPVD handlesets naturally have a dull appearance. Do not attempt to polish the HPVD handleset as it will destroy the protective finish.

MAINTENANCE GUIDE



1. Vacuum dirt and debris from sill and track areas before washing
2. Clean glass and door frame with a mixture of mild dish soap and water. Rinse completely with clean water and wipe dry with a soft cloth to avoid water spots.
3. Avoid washing glass in direct sunlight.
4. Never use abrasive or caustic cleaners. They can cause permanent damage to the frame finish or the glass.
5. Mild, nonabrasive soaps are usually the safest for most dirt and stain removal, but any cleaner you use should be tested in an inconspicuous area first.
6. Always rinse completely with clear water and wipe dry if possible.
7. Check to make sure drainage or “weep” holes are always clear of dirt and obstructions - both inside and outside the door in the bottom of the frame.
8. Clean screens by removing them, washing them on a flat, clean surface with mild soap and water and a soft brush. Then rinse, wipe dry and reinstall.
9. Doors with moving parts include hardware components that should be lubricated periodically. In salt-air environments, these components require monthly lubrication.
10. After wiping clean, use a silicone spray with a non-petroleum-based propellant on door or sliding door tracks, rollers and locking hardware



Ideal Construction Practices



For optimum performance of your Neuma Door, it is important to follow sound construction practices when installing the door. Neuma Doors are designed to protect against water infiltration, however, there are steps that can be taken during the installation process in order to provide complete protection to your home. Be sure to acquaint yourself with local building codes and follow all recommendations of your building professional.



Adequate Overhangs

Before construction begins, it is important to plan the placement of your door. Over time, a door can be compromised by extended direct exposure to the weather. When considering the placement of the door, it is important to consider the placement of the door and what type of protection the building construction can provide for the door. An appropriate overhang over your door will help extend the finish of the door and protect the door from weather intrusion.

Plumb, Level and Square

Prior to installing the door, it is critical to ensure that the rough opening for the door is flat, level, square, plumb and free of debris for optimal door operation. As you continue through the installation process, verify at each step that the door is plumb, level and square.

Sill Pan

Use of an optional sill pan is recommended to prevent water from seeping in and to protect the subfloor beneath the door. The appropriate use of a sill pan can greatly reduce the chance of water intrusion beneath the door.

Non-Structural Nailing Fin

Neuma Doors provides a non-structural nailing fin to assist with the installation of the door and to provide an additional layer of weather protection.

Drip Cap

Installing a drip cap is a simple way to protect your home from water. Easily installed, drip caps are designed to drain water away before it reaches the door unit

Weather Barrier

Use of an appropriate flashing or waterproof barrier applied around the door opening to the top of the nailing fin is required. This weather barrier prevents water from dripping behind the nailing fin and into the structure of the wall.



The Ivy - River Oaks 2303 Mid Lane, Houston TX

Limited Lifetime Warranty

For full warranty information, exclusions, limitations, and warranty service request procedures, please visit <http://www.neumadoors.com/pdf/warranty.pdf>.

Nanya Plastics Corporation USA offers a non-transferable limited lifetime warranty of the Neuma patio door system against: defects in materials and workmanship including; peeling, cracking and delamination. Proper maintenance is required. It does not cover variations or changes in the color of the door panel including but not limited to chalking and discoloration. Should such changes occur, panels may be painted according to manufacturer instructions. Door trim and handle finish are not covered. This limited warranty is in lieu of and excludes all other warranties not expressly set forth, express or implied by operation of law or otherwise, including without limitation to any implied warranties of merchantability or fitness for a particular purpose. To the extent that any implied warranties may nonetheless exist by operation of law, such warranties are limited to the duration provided by law. The limitations on the length of implied warranties vary from state to state and therefore, such limitations may not be applicable in your state.

Subject to the conditions, exclusion and limitations contained herein, Nan Ya Plastics Corporation USA warrants that the Neuma Patio Door System is free from defects in materials and workmanship from the date of original installation when it has been properly installed in compliance with the manufacturer's installation instructions.

Warranty Coverages During the First Year

Nan Ya Plastics Corporation USA will repair or replace any factory defective door system components or parts at no charge, during the first year after installation.

Warranty Coverages After the First Year

After the first year, replacement parts may be provided at no cost (if found to be a warrantable item), but there is no coverage of labor charges for the removal of defective products or for installation of replacement products. Nan Ya Plastics Corporation USA does not have responsibility, liability, or obligation for, nor will it pay for any removal or installation labor costs for the replacement product.

Warranty Details for Neuma Door Systems in Owner-Occupied Single Family Homes

This Non-Transferable Limited Warranty applies only to the Neuma Patio Door System installed by a licensed and bonded contractor in original owner-occupied single-family detached homes within the United States.

Warranty Coverages for Neuma Door System Components Installed in Owner-Occupied Single Family Homes

1. Door frames: Lifetime for original purchaser as long as purchaser owns home.
2. Mullions: Lifetime for original purchaser as long as purchaser owns home.
3. Astragals: Lifetime for original purchaser as long as purchaser owns home.
4. Door panels: Lifetime for original purchaser as long as purchaser owns home.
5. Transom Frames: Lifetime for original purchaser as long as purchaser owns home.
6. Locking Mechanism: 10 years for the original purchaser, excludes trim finish.
7. Factory Painted Finish:
 - 2 years for the original purchaser against deficiencies of blistering, cracking, peeling or loss of adhesion.
 - Warranty on painted finish applies only to doors that are factory painted by Nan Ya Plastics Corp. USA.
 - Slight imperfections in factory applied finishes; surface cracks that do not compromise the underlying material are not considered a defect.
8. Folding Door System Hardware and Components:
 - Folding door system hardware: 10 years for the original purchaser, excludes finish
 - All hardware should be maintained as recommended in the care instructions as frequently as necessary.
 - Hardware in coastal environments should be maintained every three months as a minimum and more frequently if necessary.
9. Glass Components:
 - NonImpact Glass: 20 year prorated limited warranty against seal failure.
 - Impact Glass: 10 year prorated limited warranty against seal failure.
 - Glass with Mini Blinds: 5 year prorated limited warranty against seal failure only and 1 year

warranty of the magnetic components.

- Decorative Glass: 1 year limited warranty against seal failure. Due to the nature of decorative glass, it is expected that there will be slight inconsistencies in coming and beveled glass pieces. Such inconsistencies are not warrantable.

Nan Ya Plastics Corporation USA warrants that insulated glass shall be free from any failure or material obstruction of vision due to a failure of the glass seal for the warranty period.

A failed glass seal is defined as one that shows a significant amount of obstruction due to moisture created by a seal failure. Small marks, scratches, and spots which do not exceed company standards or federal government specifications, C 1036-85 do not make insulated glass units defective. See glass warranty chart for more information.

Warranty Details for Neuma Door Systems in Multi-Family and Commercial Applications

This Non-Transferable Limited Warranty applies only to the Neuma Patio Door System installed by a licensed and bonded contractor in (1) residential applications other than original owner-occupied single-family detached homes, and (2) commercial applications within the United States

Warranty Coverage for Neuma Door System Components Installed in Residential and Commercial Applications

1. Door frames: 10 years from date of installation.
2. Mullions: 10 years from date of installation.
3. Astragals: 10 years from date of installation.
4. Door panels: 10 years from date of installation.
5. Transom frames: 10 years from date of installation.
6. Locking Mechanism: 5 years from the date of installation, excludes trim finish.
7. Factory Painted Finish:
 - 2 years for the original purchaser against deficiencies of blistering, cracking, peeling or loss of adhesion.
 - Warranty on painted finish applies only to doors that are factory painted by Nan Ya Plastics Corp. USA.
 - Slight imperfections in factory applied finishes; surface cracks that do not compromise the underlying material are not considered a defect.
8. Folding Door System Hardware and Components:

nents:

- Folding door system hardware: 10 years for the original purchaser, excludes finish
- All hardware should be maintained as recommended in the care instructions as frequently as necessary.
- Hardware in coastal environments should be maintained every three months as a minimum and more frequently if necessary.

9. Glass Components:

- NonImpact Glass: 20 year prorated limited warranty against seal failure.
- Impact Glass: 10 year prorated limited warranty against seal failure.
- Glass with Mini Blinds: 5 year prorated limited warranty against seal failure only and 1 year warranty of the magnetic components.
- Decorative Glass: 1 year limited warranty against seal failure. Due to the nature of decorative glass, it is expected that there will be slight inconsistencies in coming and beveled glass pieces. Such inconsistencies are not warrantable.

Nan Ya Plastics USA warrants that insulated glass shall be free from any failure or material obstruction of vision due to a failure of the glass seal for the warranty period. A failed glass seal is defined as one that shows a significant amount of obstruction due to moisture created by a seal failure. Small marks, scratches, and spots which do not exceed manufacturer standards or federal government specifications, C 1036-85 do not make insulated glass units defective. See glass warranty chart for additional information.

Warranty Exclusions

Generally, Nan Ya Plastics Corp. USA, d/b/a Neuma Doors does not cover normal wear and tear, or damage resulting from improper installation, misuse, abuse, neglect, improper maintenance, and alterations or damage caused by others. Doors must be properly maintained to preserve their appearance. Nan Ya Plastics Corporation USA does not have responsibility, liability, or obligation, for property damages arising from a Warranty claim on a Neuma Door System. Maintenance guide can be found at <http://www.neumadoors.com/pdf/Maintenance.pdf>.



NAN YA PLASTICS CORP. USA
D.B.A Neuma Doors

4106 Shadrack Houston, Texas 77013

Toll free : 1-866-Doors-15 1-866-366-7715 Fax : 1-888-862-6555

www.neumadoors.com